

# QuickSpecs

## HPE MSA P2000 G3 Modular Smart Array Systems

### Overview

### HPE MSA P2000 G3 Modular Smart Array Systems

HPE's MSA P2000 Family of storage arrays features P2000 G3 arrays with the latest 8 GB Fibre Channel, 6 GB SAS, 10GbE iSCSI connected models, and an iSCSI model with four 1 GB iSCSI ports per controller. The arrays are designed for entry-level customers and feature the latest in functionality and host-connect technology while offering excellent price/performance. They are ideal for companies with small budgets or limited IT expertise, and also larger companies with departmental or remote requirements. Each solution is designed to be easy to deploy, to be secure, along with low management costs, while driving rapid return on investment through efficient storage consolidation.

The MSA P2000 G3 arrays are 2U storage area network (SAN) or direct connect solutions (OS and protocol dependent) offering a choice of five controllers - two FC, one SAS, one 10GbE iSCSI and the newest model features a four port 1 GB iSCSI. The first Fibre Channel controller is a high-performance, 8 GB dual port model. The second offering is a unique dual-purpose Combo controller with two 8 GB Fibre Channel ports with the addition of two 1GbE iSCSI ports. The third controller choice is 6Gb SAS with four ports per controller. There is also the addition of a two port 10 GB iSCSI, while the latest controller introduction features four 1 GB iSCSI ports per controller. Whatever the situation calls for, the P2000 G3 line-up has the right solution.

The dual-protocol MSA P2000 G3 MSA FC/iSCSI Combo Controller gives exceptional flexibility. The 8 GB FC ports support a full FC SAN while the two 1GbE iSCSI ports can serve two purposes. With this combination you can economically share the array storage resource with a smaller department accessing it over iSCSI or enable the new optional Remote Snap functionality over iSCSI protocol (also available over FC).

The MSA P2000 G3 SAS is the follow-on product to the MSA2000sa G2, adding the latest 6 GB SAS technology to the four host ports per controller. The P2000 G3 SAS array is designed for directly attaching up to four dual-path or eight single path rack servers. SAS array support for BladeSystems utilizes the HPE 6 GB SAS BL Switch.

The MSA P2000 G3 10GbE iSCSI brings the very latest in high-performance host connection with technology generally found only in higher priced arrays. The bandwidth it provides in conjunction with server consolidation is highly advantageous in shared storage configurations. Array connection to 10GbE switches that are in turn connected to 1GbE NICs is commonplace. Directly attached server support requires the server units to have 10GbE NICs.

Rounding out the controller choices is the MSA P2000 G3 iSCSI controller featuring four 1Gb iSCSI Ethernet ports, double the number of the G2 model. This allows an array that keeps the price of the components, particularly the interconnection, low while markedly increasing the performance capabilities.

All MSA P2000 G3 models can be equipped with single or dual controllers, feature the same scalability, and offer 6 GB SAS back-end transmission speed to drives and JBODs. Significant data protection advances are delivered by the all P2000 G3 arrays. All G3 units come STANDARD with sixty-four snapshot capability at no extra cost and there is an option for the G3 series of five hundred and twelve snapshots. Volume Copy (clone) also comes standard. In a further move to protect the user's data, optional Remote Snap (replication) capability is offered on the FC, FC/iSCSI, and both iSCSI versions.

All MSA P2000 G3 models support hot plug replacement of redundant controllers, fans, power supplies, and I/O modules. Hot add of expansion enclosures is also supported.

The controller-less MSA P2000 chassis is offered in two models - one comes standard with twelve Large Form Factor (LFF) 3.5-inch drive bays, the other can accommodate twenty-four Small Form Factor (SFF) 2.5-inch drives. Both are able to simultaneously support enterprise-class SAS drives, SAS Midline, and archival-class SATA Midline drives. Either chassis can have one or two matching P2000 G3 controllers (same protocol) and are available with AC or DC power Supplies.

The Hewlett Packard Enterprise modular approach to entry level SAN solutions enables incremental customer purchases, allowing


## Overview

the array to grow as needs grow, thus allowing a maximum return on investment. Choose a single controller unit for low initial cost with the ability to upgrade later; or decide on a model with dual controllers for the most demanding entry-level situations. There are no unexpected additional charges, licenses or fees as you add enclosures or hosts and users.


Capacity can easily be added as the need develops by attaching additional drive enclosures. Maximum capacity ranges with LFF drives up to 57.6 TB SAS, 57.6 TB SAS Midline or 192 TB SATA Midline with the addition of the maximum number of drive enclosures. Configurations utilizing the SFF drive chassis and the maximum number of drive enclosures can grow to 178 TB of SAS, 14.9 TB of SAS Midline or 74.5 TB SATA Midline with a total of 96 LFF or 149 SFF drives. The P2000 G3 Arrays do not support SSDs.

## What's New in the P2000 G3 array family


- Introducing support for 12G SFF Hard Disk Drives.
  - HPE MSA 300GB 12G SAS 10K 2.5in Dual Port Enterprise 3yr Warranty Hard Drive
  - HPE MSA 600GB 12G SAS 10K 2.5in Dual Port Enterprise 3yr Warranty Hard Drive
  - HPE MSA 900GB 12G SAS 10K 2.5in Dual Port Enterprise 3yr Warranty Hard Drive
  - HPE MSA 1.2TB 12G SAS 10K 2.5in Dual Port Enterprise 3yr Warranty Hard Drive

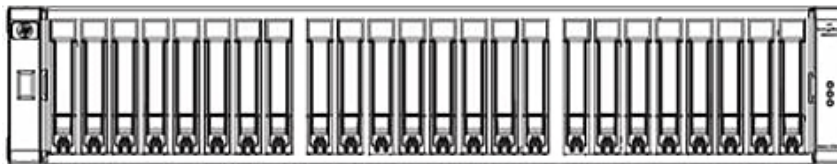

**HPE P2000 G3 SFF Modular Smart Array**

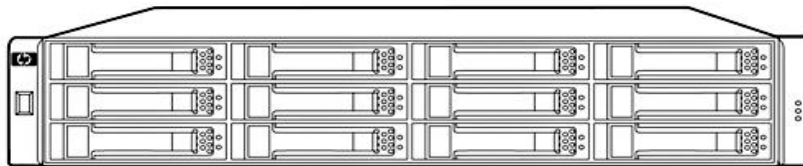


**HPE P2000 G3 LFF Modular Smart Array**

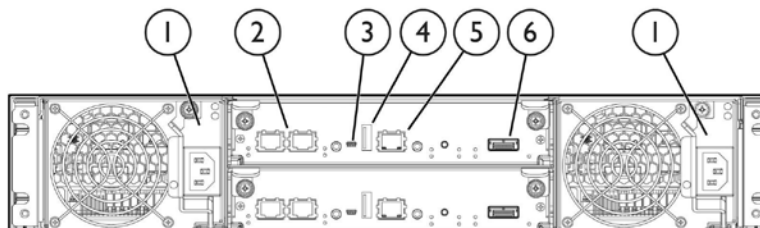

### **P2000 G3 FC Controllers, 2 installed**


- |                             |                             |
|-----------------------------|-----------------------------|
| 1. Power supplies           | 4. Reserved for future use  |
| 2. 8 GB Fibre Channel ports | 5. Management Ethernet port |
| 3. CLI port (mini-USB)      | 6. Expansion port           |

Overview

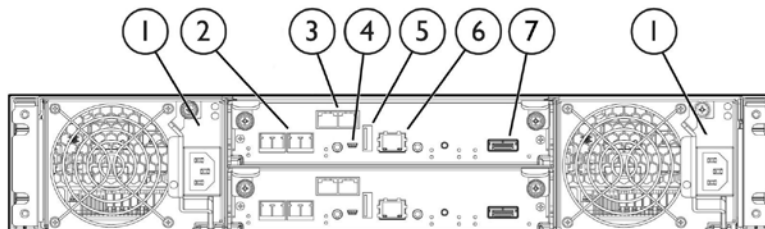


**P2000 G3 FC/iSCSI Combo Controllers, 2 installed**

- 1. Power supplies
- 2. 8 GB Fibre Channel ports
- 3. 1GbE iSCSI ports
- 4. CL I port (mini-USB)
- 5. Reserved for future use
- 6. Management Ethernet port
- 7. Expansion port

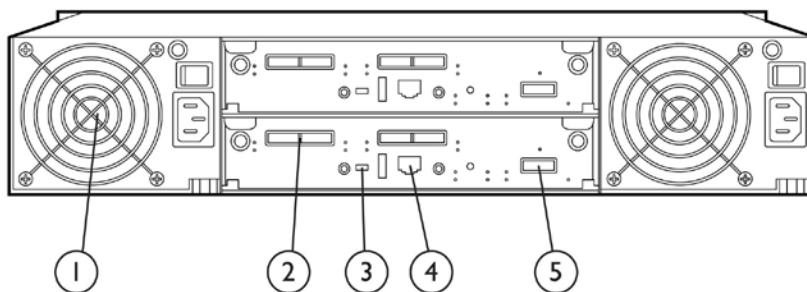

**P2000 G3 SAS controllers, 2 installed**


- 1. Power supplies
- 2. 6Gb SAS ports (four per controller)
- 3. CL I port (mini-USB)
- 4. Management Ethernet port
- 5. Expansion port

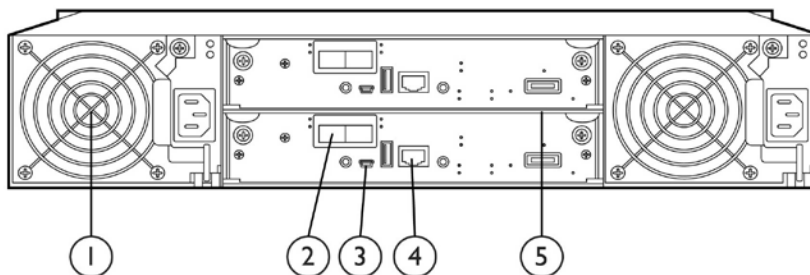

**P2000 G3 10GbE iSCSI controllers, 2 installed**

- 1. Power supplies
- 2. 10GbE iSCSI ports
- 3. CL I port (mini-USB)
- 4. Management Ethernet port
- 5. Expansion port

Overview

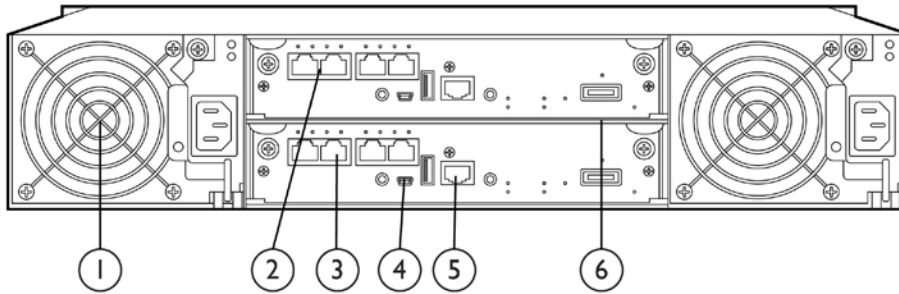

**P2000 G3 iSCSI dual controller**

- |                          |                             |
|--------------------------|-----------------------------|
| 1. Power supplies        | 4. CLI port (mini-USB)      |
| 2. 1 GbE iSCSI ports (4) | 5. Management Ethernet port |
| 3. 1 GbE iSCSI ports (4) | 6. Expansion port           |

Models

**P2000 G3  
Modular Smart Array**

**P2000 G3 Controllers**

**P2000 G3 Fibre Channel Controllers**

HP P2000 G3 MSA Fibre Channel Controller AP836B

**NOTE:** two 8Gb FC ports per controller

HP P2000 G3 MSA FC/iSCSI Combo Modular Smart Array Controller AP837B

**NOTE:** two 8Gb FC ports and two 1GbE iSCSI ports per controller

**P2000 G3 SAS Controller**

HP P2000 G3 SAS MSA Array System Controller AW592B

**NOTE:** four 6Gb SAS ports per controller

**P2000 G3 10GbE iSCSI controller**

HP P2000 G3 10GbE iSCSI MSA Array System Controller AW595B

**NOTE:** two 10GbE iSCSI ports per controller

**P2000 G3 iSCSI controller (1Gb Ethernet)**

HP P2000 G3 iSCSI MSA Array System Controller BK829B

**NOTE:** four 1Gb iSCSI ports per controller

**P2000 Chassis**

**P2000 Controller-less Chassis (AC-powered)**

HP P2000 LFF Modular Smart Array Chassis AP838B

**NOTE:** Will accept one or two controllers or Disk Enclosure I/O modules

HP P2000 SFF Modular Smart Array Chassis AP839B

**NOTE:** Will accept one or two controllers, not I/O modules

**P2000 G3 Configured Array Systems**

**Configured Units, 8 GB Fibre Channel Systems**

HP P2000 G3 MSA FC/iSCSI Dual Combo Controller LFF Array AW567B

HP P2000 G3 MSA FC/iSCSI Dual Combo Controller SFF Array AW568B

**Configured Units, 6 GB SAS Systems**

HP P2000 G3 SAS MSA Dual Controller LFF Array System AW593B

HP P2000 G3 SAS MSA Dual Controller SFF Array System AW594B

**Configured Units, 10GbE iSCSI Systems**

HP P2000 G3 10GbE iSCSI MSA Dual Controller LFF Array System AW596B

HP P2000 G3 10GbE iSCSI MSA Dual Controller SFF Array System AW597B

**Configured Units, 1Gb iSCSI Systems**

HP P2000 G3 iSCSI MSA Dual Controller LFF Array System BK830B

HP P2000 G3 iSCSI MSA Dual Controller SFF Array System BK831B

**P2000 G3 FC SAN Starter Kits**

HP P2000 G3 FC MSA Dual Controller Small Business SAN Starter Kit AP847B

includes (1) HPE P2000G3 MSA FC Dual Controller LFF Array (AP845B), (2) HPE SN6000 12port Single Power FC Switch (BK780B), (4) HPE 81Q PCI-e FC Single Port HBA (AK344A), (12) 8Gb Short Wave FC SFPs (AJ718A), and (8) HPE 5M OM3 FC Cables (AJ836A).

HP P2000 G3 FC MSA Dual Controller Virtualization SAN Starter Kit AP848B

Models

(includes (1) HPE P2000G3 MSA FC Dual Controller SFF Array (AP846B), (2) HPE 8/24 Base 16 Ports Enabled SAN Switch (AM868B), (6) HPE 81B PCI-e 8Gb FC Single Port HBA (AP769A), (16) 8Gb Short Wave B Series FC SFPs (AJ716B), and (10) HPE 5M OM3 FC Cables (AJ836A)

**Disk Enclosures**

HP P2000 Dual I/O LFF Drive Enclosure	AP843B
HP P2000 LFF Drive Enclosure I/O Module	AP844B
HPE D2700 Disk Enclosure	AJ941A
HPE MSA 2040 Energy Star LFF Disk Enclosure	MOS96A

**Controller-less Chassis (DC-powered)**

HP P2000 DC-power LFF Chassis	AP840B
(can add one or two P2000 G3 controllers or P2000 JBOD I/O modules)	
HP P2000 DC-power SFF Chassis	AP841B

**P2000 G3 Array Bundles**

In some areas Hewlett Packard Enterprise is offering P2000 G3 Array bundles with SFF SAS drives. These bundles can simplify the process of ordering. Hewlett Packard Enterprise offers these bundles with different type of P2000 G3 Array controllers for different storage capacity needs.

**NOTE:** These bundles are not offered worldwide so please check the availability for your region

Protocol	Raw Capacity	Regions Availability	Bundle Description	SKUs
<b>Fully Populated Bundles:</b>				
FC Bundles	3.5 TB	AMS APJ	HP P2000 G3 FC DC w/24 146GB SAS 15K SFF HDD 3.5TB Bundle	BV901B
	7.2 TB	AMS APJ	HP P2000 G3 FC DC w/24 300GB SAS 10K SFF HDD 7.2TB Bundle	BV902B
	14.4 TB	AMS APJ	HP P2000 G3 FC DC w/24 600GB SAS 10K SFF HDD 14.4TB Bundle	BV903B
	21.6 TB	AMS APJ	HP P2000 G3 FC 24x900GB SAS SFF Bundle	QR517B
	24 TB	AMS APJ	HP P2000 G3 FC 24x1TB SAS SFF Bundle	QR521B
	7.2 TB AMS	AMS APJ	HP P2000 G3 FC DC w/24 300GB SAS 15K SFF HDD 7.2TB Bundle	QW945B
SAS Bundles	7.2 TB	AMS APJ	HP P2000 SAS DC w/24 300GB SAS 10K SFF HDD 7.2TB Bundle	BV908B
	14.4 TB	AMS APJ	HP P2000 SAS DC w/24 600GB SAS 10K SFF HDD 14.4TB Bundle	BV909B
	21.6 TB	AMS APJ	HP P2000 G3 SAS MSA DC w/24 900GB SAS 10K SFF HDD 21.6TB Bundle	QR519B
	24 TB	AMS APJ	HP P2000 G3 SAS MSA DC w/24 1TB SAS 7.2K SFF MDL HDD 24TB Bundle	QR523A
1G iSCSI	7.2 TB	AMS	HP P2000 G3 iSCSI DC w/24 300GB	BV911B

QuickSpecs

HPE MSA P2000 G3 Modular Smart Array Systems

Models

Bundles		APJ	SAS 10K SFF HDD 7.2TB Bundle	
	21.6 TB	AMS APJ	HP P2000 G3 iSCSI MSA DC w/24 900GB SAS 10K SFF HDD 21.6TB Bundle	QR520B
	24 TB	AMS APJ	HP P2000 G3 iSCSI MSA DC w/24 1TB SAS 7.2K SFF MDL HDD 24TB Bundle	QR524B
<b>Half Populated Bundles:</b>				
FC Bundles	3.6 TB	AMS APJ	HP P2000 G3 FC DC w/12 300GB SAS 10K SFF HDD 3.6TB Bundle	BV913B
	7.2 TB	AMS APJ EMEA	HP P2000 G3 FC DC w/12 600GB SAS 10K SFF HDD 7.2TB Bundle	BV914B
	10.8 TB	AMS APJ	HP P2000 G3 FC MSA DC w/12 900GB SAS 10K SFF HDD 10.8TB Bundle	QR525B
	12 TB	AMS APJ	HP P2000 G3 FC MSA DC w/12 1TB SAS 7.2K SFF MDL HDD 12TB Bundle	QR529B
	3.6 TB	AMS APJ	HP P2000 G3 FC DC w/12 300GB SAS 15K SFF HDD 3.6TB Bundle	QW949B
FC/iSCSI Combo Bundles	10.8 TB	AMS APJ	HP P2000 G3 FC/iSCSI MSA DC w/12 900GB SAS 10K SFF HDD 10.8TB Bundle	QR526B
	12 TB	AMS APJ	HP P2000 G3 FC/iSCSI MSA DC w/12 1TB SAS 7.2K SFF MDL HDD 12TB Bundle	QR530B
SAS Bundles	3.6 TB	AMS APJ	HP P2000 G3 SAS DC w/12 300GB SAS 10K SFF HDD 3.6TB Bundle	BV917B
	7.2 TB	AMS APJ	HP P2000 G3 SAS DC w/12 600GB SAS 10K SFF HDD 7.2TB Bundle	BV918B
	10.8 TB	AMS APJ	HP P2000 G3 SAS MSA DC w/12 900GB SAS 10K SFF HDD 10.8TB Bundle	QR527B
	12 TB	AMS APJ	HP P2000 G3 SAS MSA DC w/12 1TB SAS 7.2K SFF MDL HDD 12TB Bundle	QR531B
	3.6 TB	AMS APJ	HP P2000 G3 SAS DC w/12 300GB SAS 15K SFF HDD 3.6TB Bundle	QW951B
1G iSCSI G3 Bundles	3.6 TB	AMS APJ	HP P2000 G3 iSCSI DC w/12 300GB SAS 10K SFF HDD 3.6TB Bundle	BV919B
	7.2 TB	AMS APJ	HP P2000 G3 iSCSI DC w/12 600GB SAS 10K SFF HDD 7.2TB Bundle	BV920B
	10.8 TB	AMS APJ	HP P2000 G3 iSCSI MSA DC w/12 900GB SAS 10K SFF HDD 10.8TB Bundle	QR528B

**QuickSpecs**

**HPE MSA P2000 G3 Modular Smart Array Systems**

**Models**

	12 TB	AMS APJ	HP P2000 G3 iSCSI MSA DC w/12 1TB SAS 7.2K SFF MDL HDD 12TB Bundle	QR532B
	3.6 TB	AMS APJ EMEA	HP P2000 G3 iSCSI DC w/12 300GB SAS 15K SFF HDD 3.6TB Bundle	QW952B



## Features

### Key Features

The HPE P2000 G3 Modular Smart Array family encompasses five controllers, each featuring different protocols or combination of protocols to match the exact needs of the user.

- P2000 G3 FC/iSCSI Combo MSA controller: this unique controller offers both 8 GB Fibre Channel and 1 GbE iSCSI functionalities built into a single array controller. This allows customers to enable storage needing high performance thru the FC ports while leveraging their SAN investment by sharing the array resources with smaller departments through low-cost iSCSI. It also enables optional Remote Snap (replication) for data protection.
- P2000 G3 FC MSA controller: Dual 8 GB Fibre Channel host ports per controller give high performance with a mature topology and is compatible with the largest installed base of SAN users.
- P2000 G3 10GbE iSCSI MSA controller: Hewlett Packard Enterprise was the first of the major modular array manufacturers that brought a high performance dual-ported 10GbE iSCSI solution to the entry level segment. Ideal for those who want to utilize cost-effective Ethernet as their infrastructure without sacrificing access time to their data. Now supports Remote Snap (replication).
- P2000 G3 SAS MSA controller: the P2000 G3 SAS model gives fast 6 GB transmission rates with low cost SAS connections. Four host ports per controller support a highly efficient direct connect configuration.
- P2000 G3 iSCSI MSA controller offers four 1 GB iSCSI ports utilizes the popular Ethernet infrastructure with its low cost and ease of management, while the additional ports assure increased performance over the previous generation. Now supports Remote Snap (replication).

---

### All P2000 G3 models offer a common set of valuable features:

- Ease of management featuring browser-based out-of-band access. This allows a department or small company to effectively handle growing storage requirements, with the aid of an intuitive GUI to administer the unit with a minimum of complexity. Ideal for local or remote installations.
- All G3 models come standard with 64 controller-based snapshots and clone capability. The G3 arrays also support an optional 512 snaps.
- Choose either a low-cost single controller array or start with a configured dual controller array model to fit the budget, high availability, and performance needs.
- All models feature a wide variety of drives: enterprise-class SAS, SAS Midline, and archival-class SATA Midline in either P2000 LFF 3.5-inch or HPE Storage SFF 2.5-inch drives.
- P2000 G3 models can have a maximum number of P2000 LFF drive enclosures (7), a maximum number of D2700 SFF enclosures (5), or mix both sizes. The array can grow incrementally from a few drives to 178 TB SAS, 576 TB of SAS MDL or 192 TB SATA MDL.
- 2 GB transportable read/write cache per controller. Battery-free cache backup with super capacitors and compact flash
- Vdisks can be spanned across multiple enclosures  
RAID levels 0, 1, 3, 5, 6, 10, 50
- Maximums vary by RAID levels: 2 drive max for RAID level 1; max of 16 drives for RAID levels 0, 3, 5, 6, and 10; max of 32 drives for RAID level 50
- 512 LUNs with LUN sizes greater than 40TB depending on the RAID configuration chosen. The maximum LUN size is 64 TB
- Non-disruptive on-line controller code upgrade (requires dual controllers w/ multi-pathing software)
- Upgradable by design. Owners of an original MSA2000 G1 or G2 array are able to do data-in-place controller upgrades to the P2000 G3 FC, Combo FC/iSCSI, 1 GB or 10GbE iSCSI, or P2000 G3 SAS. Cross protocol upgrades are also supported between the protocols. This unique ability protects the earlier investments in chassis, drives, and JBODs

Follow us on twitter and be a part of the conversation, and get the latest P2000 G3/MSA related news and information at:

<http://www.twitter.com/MSAstorage>

## Features

---

### HPE P2000 G3 FC MSA SAN Starter Kits

The new P2000 G3 FC MSA SAN Starter kits are offered to simplify ordering and implementation of your SAN. Hewlett Packard Enterprise includes all the necessary hardware components to build your own SAN solution in one package, just add the drives of your choice. These kits are offered at very affordable prices which reflect a savings over purchasing each SAN component separately.

#### Virtualization SAN Starter Kit

HP P2000 G3 FC MSA Dual Controller Virtualization SAN Starter Kit

AP848B

The HPE P2000 G3 FC MSA Dual Controller Virtualization SAN Starter Kit addresses the growing need for server and storage administrators to deliver end-to-end storage, virtualization, and management capabilities across their network infrastructure. The hardware bundle consists of six Host Bus Adapters (HBAs), two FC switches, a P2000 G3 FC MSA Dual Controller Array (SFF Chassis), sixteen 8Gb FC SFPs, ten HPE 5M FC cables as well as two licenses per switch enabling Server Application Optimization (SAO) and Adaptive Networking (AN). SAO is an adapter technology that offers Quality of Service (QoS) capabilities that can be used in conjunction with fabric wide QoS and to enable a high performing, virtualized infrastructure. With SAO deployed, administrators can protect a VM and its application by assigning its IO flow to a specific priority level. The QoS priorities are enforced at the hardware level, thereby providing adequate bandwidth during periods of high congestion. Applications such as email and databases achieve better performance when deployed in specific SAO and MSA configurations.

#### Small Business SAN Starter Kit

HP P2000 G3 FC MSA Dual Controller Small Business SAN Starter Kit

AP847B

The HPE P2000 G3 FC MSA Dual Controller Small Business SAN Starter Kit is a unique end-to-end 8 Gbps SAN Solution, just add disks and power. This kit includes one 8 Gbps P2000 G3 FC MSA Dual Controller Array (LFF Chassis), four 8 Gbps FC HBAs, two HPE SN6000 Stackable 8 Gbps 8-port FC switches, twelve 8Gb FC SFPs, eight HPE 5M FC cables and HPE unique Simple SAN Connection Manager (SSCM) SAN management software, cables, rails and optics. SSCM is the only SAN management software that can manage the FC switch, HBA and provision HPE storage from a single pane of glass.

---

### Application Solutions

The HPE P2000 SAN is the ideal solution for customers running Oracle, Microsoft, SAP environments and those customers who are deploying virtual server technologies like VMware, Hyper-V, and Oracle Virtual Machine. The HPE P2000 SAN delivers enterprise functionality that enhances virtual environments, simplifies management, and reduces costs. Easy to deploy, scale and maintain, HPE P2000 SANs ensure that crucial business data remains available.

Hewlett Packard Enterprise has developed best-in-class expertise in Oracle, Microsoft, SAP, and Virtualization Hypervisor technology through extensive testing with the HPE P2000 SAN, HPE servers, and management software; high availability and disaster recovery solutions; and backup and recovery on the Oracle, Microsoft, and SAP application platforms. As a result, our customers can expect a wide range of operational and business benefits where they can:

- Deploy IT assets across multiple locations.
- Incrementally grow storage without interruption.
- Enable high availability and disaster recovery capabilities for critical applications.
- Deploy a remote disaster recovery site.

### Learn more

To learn more about specific HPE Storage Solutions that are built with Oracle, Microsoft, SAP and Virtualization environments in mind, visit the solution sites supporting each of these applications.

HPE Storage for Oracle hyperlink to: <http://www.hp.com/storage/oracle>

HPE Storage for Microsoft hyperlink to: <http://www.hp.com/storage/microsoft>

HPE Storage for SAP hyperlink to: <http://www.hp.com/storage/sap>

## Features

HPE Storage for VMware hyperlink to: <http://www.hp.com/go/vmware/storage>

Family Information

	<b>P2000 G3 FC</b>	<b>P2000 G3 SAS</b>	<b>P2000 G3 10GbE iSCSI</b>	<b>P2000 G3 iSCSI (1GbE)</b>
<b>Capacity</b> Minimum / with maximum additional drive enclosures	<b>LFF:</b> 7.2 TB SAS or 72 TB SAS MDL or 24 TB SATA MDL w/ 7 LFF enclosures: 57.6 TB SAS, 576 TB SAS MDL or 192 TB SATA <b>SFF:</b> 28 TB SAS or 24 TB SAS MDL or 12 TB SATA MDL w/ 5 D2700 JBODs: 178 TB SAS or 149 TB SAS MDL or 74.5 TB SATA MDL	<b>LFF:</b> 7.2 TB SAS or 72 TB SAS MDL or 24 TB SATA MDL w/ 7 LFF enclosures: 57.6 TB SAS, 576 TB SAS MDL or 192 TB SATA <b>SFF:</b> 28 TB SAS or 24 TB SAS MDL or 12 TB SATA MDL w/ 5 D2700 JBODs: 178 TB SAS or 149 TB SAS MDL or 74.5 TB SATA MDL	<b>LFF:</b> 7.2 TB SAS or 72 TB SAS MDL or 24 TB SATA MDL w/ 7 LFF enclosures: 57.6 TB SAS, 576 TB SAS MDL or 192 TB SATA <b>SFF:</b> 28 TB SAS or 24 TB SAS MDL or 12 TB SATA MDL w/ 5 D2700 JBODs: 178 TB SAS or 149 TB SAS MDL or 74.5 TB SATA MDL	<b>LFF:</b> 7.2 TB SAS or 72 TB SAS MDL or 24 TB SATA MDL w/ 7 LFF enclosures: 57.6 TB SAS, 576 TB SAS MDL or 192 TB SATA <b>SFF:</b> 28 TB SAS or 24 TB SAS MDL or 12 TB SATA MDL w/ 5 D2700 JBODs: 178 TB SAS or 149 TB SAS MDL or 74.5 TB SATA MDL
<b>Controller Cache</b>	2 GB per controller	2 GB per controller	2 GB per controller	2 GB per controller
<b>Total LUNs</b> LUN sizes greater than 40TB depending on the RAID configuration chosen	512 maximum LUN size: 64TB	512 maximum LUN size: 64TB	512 maximum LUN size: 64TB	512 maximum LUN size: 64TB
<b>Host connect</b> P2000 & MSA2000 have 1 or 2 controllers, EVA has 2 controllers standard	Two 8 GB Fibre Channel ports or Two 8Gb FC and two 1GbE iSCSI ports per controller	Four 6 GB (x4) SAS ports per controller	Two 10 GbE iSCSI ports per controller	Four 1 GB iSCSI ports per controller
<b>Maximum Drives</b> w/ expansion	96 LFF/149 SFF	96 LFF/149 SFF	96 LFF/149 SFF	96 LFF/149 SFF
<b>Maximum host supported</b> (dual controller)	64	64 w/ SAS switch: 32 single blade servers (2x c7000), or 16 dual density blade servers	64	64
<b>Optional software: Snapshot, clone, Remote Snap</b>	Snapshot, 64 standard (max 512) Clone (standard) Remote Snap (optional)	Snapshot, 64 standard (max 512) Clone (standard)	Snapshot, 64 standard (max 512) Clone (standard) Remote Snap (optional)	Snapshot, 64 standard (max 512) Clone (standard) Remote Snap (optional)
<b>Use for Storage</b>	Primary Storage with SAS drives. Secondary with SATA	Primary Storage with SAS drives. Secondary with SATA	Primary Storage with SAS drives. Secondary with SATA	Primary Storage with SAS drives. Secondary with SATA

**NOTE:** maximum available storage capacity depends on the RAID level being implemented

Product Technology

**8Gb Fibre Channel controller**

Two host ports per FC controller shipped with SFPs. The P2000 G3 FC controller can run in either point-to-point or FCAL (loop). The default is FCAL which is used in Direct Connect, particularly with two controllers. The PtP (fabric) mode is used with almost all switches.

**Combo controller with**

This ingenious dual-protocol "combo" controller supports a full FC SAN through the 8Gb FC ports, while

## Family Information

<b>FC and iSCSI ports</b>	designating the two 1 GbE iSCSI ports to enable remote replication over iSCSI protocol and perform as an iSCSI target. This allows economical sharing of the storage resource (the P2000 G3 array) with one department needing the performance afforded by the 8 GB FC ports while simultaneously supporting another department with lesser performance needs and a budget only allowing a 1GbE iSCSI network.
<b>6Gb SAS controller</b>	Four 4x host ports per 6Gb SAS controller.
<b>10GbE iSCSI controller</b>	<p>Two 10GbE ports per G3 10GbE iSCSI controller. Ports are ready for the choice of SFP (none included) Supports the ProCurve and ISS versions of the following 10GbE parts for use in the controllers:</p> <p>HPE 10Gb Cables</p> <ul style="list-style-type: none"><li>• HPE SFP+ 10GbE Copper Cable</li><li>• HPE ProCurve 10-GbE SFP+-SFP+ Direct Attach Cable</li></ul> <p>HPE SFP+ Transceivers</p> <ul style="list-style-type: none"><li>• HPE BladeSystem 10Gb SR SFP+ and HPE BladeSystem 10Gb LRM SFP+</li><li>• HPE ProCurve 10-GbE SFP+ SR Transceiver and HPE ProCurve 10-GbE SFP+ LRM Transceiver</li><li>• No SFP+ LR Transceiver support</li></ul>
<b>1 GB iSCSI controller</b>	Four 1 GB Ethernet iSCSI ports per G3 iSCSI controller
<b>Modular Chassis</b>	2U rack height. 12 Large Form Factor or 24 Small Form Factor drive bays, accommodating SAS and SATA. Comes with space for one or two controllers, or P2000 3.5-inch disk Enclosure I/O modules (LFF chassis only)
<b>Drives available</b>	<p>The P2000 G3 controllers support both the P2000 3.5-inch Large Form Factor (LFF) drives, and the HPE Storage 2.5-inch Small Form Factor (SFF) drives.</p> <ul style="list-style-type: none"><li>• Serial Attached SCSI (SAS) enterprise-class drives are designed for high demand, 24x7 usage.</li><li>• SAS Midline and SATA Midline are usually reserved for archival of data as they are both relatively inexpensive and are available in very large capacities.</li></ul> <p>The Hewlett Packard Enterprise entry-level family of arrays can accommodate both SAS and SATA drives within the same enclosure making it ideal to have both business-critical, high activity files on SAS drives while using Snapshot, clone, or Remote Snap capability to keep back-up or archival data on the less expensive drives.</p> <p>For investment protection, the controllers will support single and dual port SAS &amp; SATA drives in a legacy single - or dual - domain MSA70. This support allows current owners of MSA70s to migrate their single port drives (in their MSA70 only, not into the array head) to be attached to a P2000 G3 FC or SAS. They can only cascade to another single I/O MSA70. This is not a data-in-place transition, and overall performance could be impacted.</p> <p>SAS drive performance can be approximately 30% greater than SATA performance on sequential host I/O. SAS performance excels in sequential lower latency response time and random I/O per second transaction performance due to higher rpm disk speeds yielding lower seek times. SAS drive random performance is generally twice that of SATA drives.</p> <p><b>NOTE: P2000 and MSA2 3.5-inch Large Form Factor (LFF) drives are for use only in the P2000 G3 or MSA2000 models. The 2.5-inch Small Form Factor (SFF) drives are supported only with the P2000 G3 or the MSA2300 G2 controllers and are Storage hot-plug 2.5-inch drives.</b></p>
<b>Optional Disk enclosures</b>	Just as the user has a choice of chassis for the array head (LFF and SFF drive bays, AC or DC powered), so also do they have a choice of expansion disk enclosures accommodating either drive size. Both the P2000 and the D2700 disk enclosures can be hot-added to an operating array.

## Family Information

**(NOTE: these are not supported as part of a NEBS-certified configuration with the MSA Carrier Grade Chassis. There is a certified JBOD listed in the Carrier-grade section)**

**P2000 3.5 - inch drive enclosure.** This 2U storage enclosure (AP843B) is designed to support twelve Storage 3.5 - inch Universal form factor (LFF) 6GbSAS or SATA hard drives. It ships standard with dual I/O modules installed.

- This 3.5-inch drive enclosure can be attached to either the P2000 G3 FC or SAS LFF or SFF array head.
- Each configured model ships standard with two .5m mini-SAS to mini-SAS cables for cascading to other P2000 drive enclosures
- Up to seven P2000 3.5-inch enclosures can be attached to a P2000 G3 FC, FC/iSCSI Combo, or SAS controller in the array head.

**D2700 2.5-inch drive enclosure.** This 2U storage enclosure (AJ941A) is designed to support twenty five ProLiant 2.5-inch Universal form factor (SFF) 6GbSAS or SATA hard drives. It ships standard with dual I/O modules installed.

- This 2.5-inch drive enclosure can be attached to a P2000 G3 controller (SFF or LFF) array head
- The D2700 enclosure ships with a two .5m miniSAS to miniSAS cable.
- Up to five D2700 may be attached to the P2000 G3 array head, given total support for 14-9 SFF drives.

**MSA 2040 3.5-inch Disk Enclosure.** This 2U unit has twelve LFF (3.5-inch) drive bays and accepts for MSA dual-ported SAS and SAS MDL drives. The pre-configured HPE MSA 2040 LFF Drive Enclosure (MOS96A) has two I/O modules and supports both single and dual controller arrays.

This 3.5-inch MSA disk enclosure can be attached to P2000 G3 FC or SAS LFF or SFF array head Each configured model ships standard with two .5m mini-SAS to mini-SAS cables for connection to the MSA 2040 array expansion port or existing disk enclosure cascade port.

Up to seven MSA 2040 3.5-inch enclosures can be attached to a P2000 G3 FC, FC/iSCSI Combo, or SAS controller in the array head.

## Scalability

The P2000 G3 FC, Combo FC/iSCSI, SAS, 1 GB or 10GbE iSCSI controllers are designed to allow an installation to begin with smaller capacity and be able to grow gradually as needed. The flexibility of SAS or SATA drive technology, form factors, sizes, speeds, and costs per GB allows a system to easily fit in almost any budget.

- Large Form Factor configurations can scale up to 7.2 TB SAS, 72 TB SAS MDL or 24 TB SATA, expandable to 57.6 TB SAS, 576 TB SAS MDL or 192 TB SATA with the addition of a maximum of seven P2000 3.5-inch Drive Enclosures.
- Small Form Factor configurations can scale from 21.6 TB SAS, 24 TB SAS MDL or 12 TB SATA MDL. With the addition of five D2700 JBODs, the P2000 G3 can support 134 TB SAS, 14-9 TB SAS MDL or 74.5 TB SATA MDL.
- Users may configure a 24-drive P2000 G3 SFF array head with 12-drive LFF P2000 3.5-inch disk enclosures. This is an excellent method for a configuration that supports fast SFF enterprise-class SAS drives in the array head, combined with economical LFF drives staged for archival purposes, all in the same array.
- Qualification of larger capacity drives is ongoing.

## Vdisks

Vdisks can span across multiple enclosures, where drives used in the Vdisk can be contained in different enclosures. The maximum number of drives that can be used in RAID 1 Vdisk is 2; RAID 0, 3, 5,

## Family Information

6, and 10 is 16; and for RAID 50 Vdisk is 32.

**LUNs** The HPE 2000 family of arrays supports 512 LUNs (total volumes in a dual controller system) and LUN sizes up to 64 TB depending on the RAID configuration chosen. The array supports expansion and deletion of any LUN.

**RAID 0, 1, 3, 5, 6, 10, 50** In addition to the usual RAID levels, the P2000 G3 features several important additional levels. RAID 6 is the highest level of RAID protection. It allocates two sets of parity data across drives and allows simultaneous write operations. It can withstand two simultaneous drive failures without downtime or data loss. RAID 10 is mirroring and striping without parity. It is the most popular of the multiple RAID levels, allowing large arrays with high performance in most cases and superior fault tolerance. RAID 50 combines the block striping and parity of RAID 5 with the straight block striping of RAID 0, yielding higher performance than RAID 5 through the addition of RAID 0, particularly during writes.

**Performance** Performance numbers are a guideline as established by tests using RAW I/O in an Operating System Agnostic test lab environment. 144 GB 15K SAS drives were used in a dual controller configuration of 12 vdisks consisting of twelve disks per vdisk, 1.6 TB volumes, and 3 volumes per host. 4 hosts directly attached to the P2000 G3 array were used in this test configuration (results cannot be expected with a single host). Results were achieved in Sequential Writes with 256K blocks; all random tests were based on 8K block sizes.

**NOTE: Number and type of applications, drive type and number of drives, operating system used, and the number of hosts will affect overall performance. This table is provided strictly as a test-lab comparison. NOTE: These numbers reflect a full array configuration with the maximum number of front-end ports, disks, and controllers. The test results shown for the P2000 G3 are designed to give a conservative reference point for comparisons.**

2000 Array Performance	P2000 G3 FC	P2000 G3 SAS	P2000 G3 10GbE iSCSI	P2000 G3 1GbE iSCSI
Protocol (host connect)	8 GB Fibre Channel	6 GB SAS	10Gb Ethernet	1 GB Ethernet
<b>2000 RAID 10 Performance Results</b>				
Sequential Reads MB/s	1,650	1,650	1,600	550
Sequential Writes MB/s	850	850	800	525
Random Mix IOPs 60/40 read/write	20,500	23,500	18,500	17,200
<b>2000 RAID 5 Performance Results</b>				
Sequential Reads MB/s	1,650	1,650	1,600	550
Sequential Writes MB/s	1,300	1,350	1,000	525
Random Mix IOPs 60/40 read/write	14,000	16,000	12,500	9,400
<b>2000 RAID 6 Performance Results</b>				
Sequential Reads MB/s	1,650	1,650	1,600	550
Sequential Writes MB/s	1,300	1,100	1,000	525
Random Mix IOPs 60/40 read/write	8,300	9,800	7,500	5,600

## Family Information

Refer to the paper titled "Upgrading the HPE MSA2000 (G1 or G2) to the P2000 G3 MSA ", available in the Resource Library at: <http://www.hp.com/go/p2000>.

### DC-power chassis

Hewlett Packard Enterprise is making the two models of controller-less chassis available with direct current (DC) power supplies. They each have the two empty bays where users can insert one or two P2000 G3 controller(s). In addition, the P2000 chassis with LFF drive bay can have P2000 3.5-inch I/O modules inserted to create a LFF DC-power JBOD.

The 500 watt power supply is designed to operate over the input range of -40VDC to -75VDC.

SKU

HP P2000 DC-power LFF Chassis

AP840B

(supports up to 2 controllers or I/O modules)

HP P2000 DC-power SFF Chassis

AP841B

### Configuration and Management Tools

HPE Storage Management Utility (SMU). Management access, out-of-band: WEB GUI, CLI. Interface Types: USB, 10/100 Ethernet. Protocols Supported SNMP, SMI-S, SSL, SSH, SMTP, FTP, HTTP, Telnet

### P2000 Software and Documents Support CD

- All product documentation (CD can be used on ALL supported server Operating Systems.)
- MSA Device Discovery Tool (Win and Linux) - reports P2000/MSA HW devices, and supported storage software
- Host Software Bundles (Win and Linux for both ProLiant x86, ProLiant x64 and Integrity IA64 servers)
- CD updated quarterly on HPE.com with sustaining firmware updates
- The P2000 G3 contains an embedded SMI-S provider for use by SMI-S client applications. The embedded provider is designed to support P2000 configurations with up to 24 hard drives, and up to 250 mapping paths. A mapping path is defined as a P2000 volume presented through a P2000 target port to a Host initiator.

### Hot Plug Expansion and Replacement Support

All P2000 G3 models support hot plug expansion and replacement of redundant controllers, enclosures, fans, power supplies, and I/O modules for simple, fast installation and maintenance. Hot add expansion of disk enclosures is also supported.

### Snapshot and Clone

All G3 arrays come standard with 64 snaps, 512 snaps available. Controller based functionality. Offers higher levels of data protection, enabling an almost instant recovery from data failure or corruption. Offers alternative development testing of 'offline' production data and the ability to backup snapped/cloned data.

<b>Overview</b>	<p>The P2000 G3 arrays come integrated with web browser and CLI based software for storage and RAID management, setup, configuration, and troubleshooting. This reduces the cost of ownership by reducing the training and technical expertise necessary to install and maintain your Hewlett Packard Enterprise storage solution.</p> <p>The SPOCK database provides interoperability information for thousands of components and millions of component combinations. It is available to all users at <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a>.</p>
<b>Server Compatibility</b> <b>NOTE:</b> depends on protocol	<p>Supports most HPE ProLiant, BladeSystems and Integrity servers including</p> <ul style="list-style-type: none"> <li>• HPE ProLiant DL, ML</li> <li>• HPE c-Class Blade Servers</li> <li>• Integrity servers, IA64 (FC and FC/iSCSI support only)</li> <li>• Compatibility must be confirmed at: <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a></li> </ul>
<b>Industry Standard servers support</b>	<ul style="list-style-type: none"> <li>• Supports most multi-vendor industry standard 32-bit Intel and AMD based (x86) servers. Hewlett Packard Enterprise requires the Third-Party Server to be logo'd and listed on the Microsoft Windows Server Catalog.</li> <li>• Refer to the Microsoft website: <a href="http://www.microsoft.com/windows/catalog/server/">http://www.microsoft.com/windows/catalog/server/</a></li> <li>• Hewlett Packard Enterprise Division recommends that the Third-Party Server Vendor is an</li> </ul>



## Family Information

	<p>active member of TSANet. Refer to the TSANet website for details: <a href="http://www.tsanet.com">http://www.tsanet.com</a></p> <ul style="list-style-type: none"> <li>Non-HPE servers will generally be supported if the HPE storage stack is used. This includes supported Hewlett Packard Enterprise branded HBAs and drivers, and supported FC switches.</li> </ul>
<p><b>OS Support Fibre Channel ports</b></p>	<p>Refer to the Hewlett Packard Enterprise support statements for complete current OS version support: <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a></p> <ul style="list-style-type: none"> <li>Microsoft Windows Server 2012</li> <li>Microsoft Windows Server 2008 IA32, x64, IA64 (Standard, Enterprise, Datacenter)</li> <li>Microsoft Windows Server 2008 R2 x64</li> <li>Microsoft Windows 2003 SP1, SP2, and R2 and 2003 R2 IA32, x64</li> <li>HPE-UX</li> <li>Red Hat Linux (32/64)</li> <li>SuSE SLES (32/64)</li> <li>Microsoft Windows Server 2008 x64 Hyper-V</li> <li>VMware</li> <li>OpenVMS</li> <li>Apple Mac OS X (requires ATTO Celerity 8Gb FC HBA)</li> <li>Solaris 10 (x86)</li> </ul>
<p><b>OS Support Fibre Channel Ports (Integrity)</b></p>	<ul style="list-style-type: none"> <li>HPE-UX</li> <li>Windows</li> <li>OpenVMS</li> <li>Linux</li> </ul>
<p><b>OS Support 1GbE iSCSI ports on the G3 Combo FC/iSCSI Controller</b></p>	<ul style="list-style-type: none"> <li>Microsoft Windows Server 2012</li> <li>Microsoft Windows Server 2008 and 2008 R2 (x64, IA64)</li> <li>Microsoft Windows Server 2008 x64 Hyper-V</li> <li>Microsoft Windows 2003 (SP1, SP2, and R2) and 2003 R2 (IA32, x64)</li> <li>Red Hat Enterprise Linux (32/64)</li> <li>SuSE Linux IA32, x64</li> <li>VMware ESX</li> </ul>
<p><b>OS Support G3 SAS Controller</b></p>	<p>Refer to the Hewlett Packard Enterprise support statements for complete current OS version support: <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a></p> <ul style="list-style-type: none"> <li>Microsoft Windows Server 2012</li> <li>Microsoft Windows Server 2008 IA32, x64</li> <li>Microsoft Windows Server 2008 R2</li> <li>Microsoft Windows 2003 and 2003 R2 IA32, x64</li> <li>Red Hat Linux (32/64)</li> <li>SuSE SLES (32/64)</li> <li>Microsoft Windows Server 2008 x64 Hyper-V</li> <li>VMware</li> <li>Solaris 10 (x86)</li> </ul>
<p><b>OS Support G3 1Gb iSCSI Controller</b></p>	<ul style="list-style-type: none"> <li>Microsoft Windows Server 2012</li> <li>Microsoft Windows Server 2008 SP1, SP2, R2</li> <li>Microsoft Hyper-V (x64 only)</li> <li>Microsoft Windows Server 2003 and 2003 R2, SP2</li> <li>VMware</li> <li>Red Hat Linux (32/64)</li> </ul>

## Family Information

	<ul style="list-style-type: none"><li>• SuSE SLES (32/64)</li></ul>
<b>OS Support G3 10GbE iSCSI Controller</b>	<ul style="list-style-type: none"><li>• Microsoft Windows Server 2012</li><li>• Microsoft Windows Server 2008 SP1, SP2, R2</li><li>• Microsoft Hyper-V (x64 only)</li><li>• Microsoft Windows Server 2003 and 2003 R2, SP2</li><li>• Red Hat Linux (32/64)</li><li>• SuSE SLES (32/64)</li><li>• VMware</li></ul> <p><b>NOTE:</b> the G3 10GbE array must connect to a 10GbE switch; direct connect to the G3 10GbE array must be to a 10GbE NIC and supported by the OS.</p>
<b>Web Browser support</b>	<ul style="list-style-type: none"><li>• The P2000 G3 and the older MSA2000 support target based management, and include a Web interface and a telnet interface, and require a web browser for management.</li><li>• The P2000 G3 FC requires Microsoft Internet Explorer V7.x or V8.x</li><li>• The original MSA2000 and the MSA2000 G2 arrays require Microsoft Internet Explorer V6.X and V7.X (strongly encouraged)</li><li>• Mozilla Firefox 1.0.7 or later is supported</li></ul>

## Software

### **VMware Site Recovery Manager (SRM)**

VMware vCenter Site Recovery Manager (SRM) is an extension to VMware vCenter that delivers business-continuity and disaster-recovery solution that helps you plan, test, and execute the recovery of vCenter virtual machines. SRM can discover and manage replicated datastores, and automate migration of inventory from one vCenter to another. Site Recovery Manager integrates with the underlying replication product through a Storage Replication Adapter (SRA).

### **HPE P2000 Site Recovery Adapter (SRA)**

The HPE P2000 SRA, a free-to-use plugin, is the program that integrates the VMware vCenter SRM with HPE P2000 G3 arrays. It enables full-featured use of the VMware SRM. It is a host-software component installed on a Microsoft Windows Server that enables disaster recovery management (DRM) software on the host to communicate and control certain aspects of the replication feature in storage systems connected to the server. It allows the VMware SRM software to automatically coordinate virtual machine failover and failback between a protected data center and a disaster recovery site by employing a disaster recovery solution called Remote Snap. A perfect combination of the Remote Snap replication and VMware SRM provides an unfailing automated solution for implementing and testing the disaster recovery between sites located across geographies. It enables communication between the HPE P2000 Remote Snap replication functionality that is embedded in HPE P2000 Fibre Channel, iSCSI, and Combo Fibre Channel systems. Users are required to acquire Remote Snap license for their local and remote HPE P2000 G3 arrays to use the HPE P2000 SRA.

Site Recovery Manager Requirements/Dependencies:

- Requires vSphere 5.0/SRM 5.0
  - Not compatible with SRM 4.x
- Requires HPE's P2000 SRA 2.0 Plug-in (downloadable from Hp.com)
- SRM works with Remote Snap functionality
  - Requires purchase of P2000 G3 Remote Snap licenses (one for each site)
- Customers must upgrade to T240 or the latest firmware
- SRM works with FC, iSCSI or Combo controllers only

### **HPE Insight Control Storage Module for vCenter**

### **HPE Insight Control Storage Module for vCenter**

HPE Insight Control Storage Module for vCenter is a component within the HPE Insight Control plug-in for vCenter. It provides VMware administrators that are using VMware's vSphere management console (vCenter) with the ability to see how virtual machines are mapped to datastores and individual P2000 volumes. By providing these clear relationships between VM's, datastores and storage, the VMware administrator's productivity increases, as does the ability to ensure quality of service. Roles for administrators can be defined on an individual basis, providing the ability to apply specific permissions for both view and control functions.

The HPE Insight Control Storage Module for vCenter supports mixed array environments including EVA, P4000, P2000 (MSA), and the XP array series including the P9500.

When deployed with the P2000 array, provides the following:

- Active Management functionality for the P2000 array:

## Software

- Create/Expand/Delete a Datastore
- Create a Virtual Machine from a template
- Monitors the health and status of the P2000
- Displays LUN/ volume connections from VMs and ESX servers to the arrays and provides the location and attributes of the P2000 within the SAN
- Identifies what storage features are available to allow administrators to match the features available on the P2000 to their requirements
- Provide a cluster-level view of the storage

HPE Insight Control Storage Module for vCenter is downloadable from Software Depot:

<https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=HPVPR>

For more information on HPE Insight Control Storage Module for vCenter visit:

<http://www.hp.com/go/vmware>

### **vStorage API for Array Integration (VAAI)**

The vStorage API for Array Integration (VAAI) is one of the storage application programming interface (API) sets in vSphere 4.1. VAAI is an API storage partners can leverage to enhance performance of virtual machine (VM) management operations by delegating these operations to the storage array. With hardware offload, ESX/ESXi hosts perform certain operations faster and consume less server CPU and memory resources, and also storage port and storage fabric bandwidth. VAAI includes high performance and scalable VM data path primitives. HPE introduced VAAI support for HPE MSA P2000 Storage array products starting with the T230 firmware release.

Storage Hardware Primitives for VAAI

In the VMware vSphere 4.1 release, the HPE StorageWorks P2000 G3 MSA Array Systems offload capabilities support the following three primitives:

- Full Copy or Hardware Assisted Move
- Block Zeroing or Hardware Assisted Zeroing
- Hardware Assisted Locking or Atomic Test and Set (ATS)

### **HPE Storage Management Pack for Microsoft System Center**

The HPE Management Pack for Systems Center Operations Manager provides seamless integration with Microsoft Systems Center Operations Manager and now System Center Essentials by integrating predefined discovery and state monitoring policies, event processing rules and tasks, and diagram and topology views for the storage system.

For more information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154363>

HPE Storage Management Pack can be downloaded free from the following website:

<https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=SCOM>

### **Snapshot and Volume Copy Software for the P2000 G3**

#### **Product Features Data Protection**

- Snapshots create up to 512 point-in-time pictures of data (512 snaps are exclusive to the P2000 G3)
- Volume Copies create up to 128 point-in-time copies of data
- Recovery is instant - revert data from any previous Snapshot or Volume Copy

Software

- Backup 'snapped' data to disk, virtual tape, or physical tape without a backup window
- A 64 snapshot license and Volume Copy are included with all P2000 G3 models.
- Support and updates are desired for bundled software functionalities (such as 64 L TU Snap and/or Volume Copy etc. in the P2000 G3 products) a combination HW + SW support care pack must be purchased.
- Hewlett Packard Enterprise does not provide warranty assistance for software products included with our base hardware products. This would either be SupportPlus or SupportPlus24. The hardware warranty component of these services is accounted for in the pricing of the SP and SP24 care packs.

**Data Testing**

- Snap or clone data to test the performance of a software application on 'offline' production data
- Snap or clone data to test how a software patch or enhancement will function on 'offline'; production dat0061

**P2000 G3 Snapshot and Clone:**

G3 controllers/models come STANDARD with 64 snapshots and Volume Copy software  
512 Snapshot option is ONLY available and supported with the G3, not the prior generation MSA2000 models

HPE P2000 Array System Snapshot 512 Software L TU TA806A

HPE P2000 Array System Snapshot 512 Software E-L TU TA806AAE

**MSA2000 and MSA2000 G2 Snapshot and Volume Copy (clone) software:**

Snapshot and Volume Copy software is optional on models other than the P2000 G3.  
The following skus are designated for use by the MSA2000 G2 models. They are neither necessary nor available for the P2000 G3 FC.

HP 2000 Modular Smart Array Volume Copy Software L TU T5514A

**HPE MSA Recovery Manager Software**

<p><b>Overview</b></p>	<p>MSA Recovery Manager (RM) intelligently creates and manages application specific snapshots that can be used to quickly restore application instances or databases. This optional software delivers a standalone solution to augment your existing backup software strategy. It provides seamless integration with HPE P2000 G3 storage hardware.</p> <p>Recovery Manager currently supports Microsoft Exchange and Microsoft SQL. Integrated with Hewlett Packard Enterprise and 3rd party back up applications, RM provides reliable data recovery. Recovery Manager is integrated with Microsoft Volume Shadow Copy Service (VSS) to make non-disruptive point-in-time copies of Microsoft Exchange and Microsoft SQL databases for constant data protection. RM eases costs and administration by providing rapid, affordable online recovery of Microsoft® SQL Server databases from multiple, highly granular point-in-time snapshots. Quickly recover a database to a known point in time, speeding up a variety of operations including rapid recovery of the production SQL server.</p> <p>For more information please visit <a href="http://www.hp.com/go/recoverymanager">http://www.hp.com/go/recoverymanager</a></p>
<p><b>What's New</b></p>	<ul style="list-style-type: none"> <li>• Support for Microsoft Exchange and Microsoft SQL.</li> <li>• Integration with Hewlett Packard Enterprise and 3rd party backup tool allowing backup to tape and/or disk.</li> <li>• Instant Recovery designed to respond to your needs for 24x7 application availability.</li> <li>• Support on multiple Windows platforms.</li> </ul>

Software

<b>Models</b>	HP MSA Recovery Manager Software LTU	TC399A
	HP MSA Recovery Manager Software E-LTU	TC399AAE
<b>Licensing</b>	<ul style="list-style-type: none"> <li>• HPE Recovery Manager Software is licensed per single array. One license is required for each array that contains data, specific to applications being supported by RM, intended for backup and recovery scenarios.</li> <li>• The above license is applicable for all the applications currently supported.</li> <li>• License bought for a specific array may not work on another similar array.</li> </ul> <p><b>NOTE: Electronic software is available in all countries except China and Japan. For China and Japan should order the physical equivalent</b></p>	
<b>Product Highlights</b>	<p>Features</p> <ul style="list-style-type: none"> <li>• Creates VSS based Point-In-Time snapshots.</li> <li>• Supports mount, deletion of snapshots.</li> <li>• Schedules snapshot creation.</li> <li>• Single GUI &amp; CLI for managing SQL and Exchange and for performing all management.</li> <li>• Auto-discovers applications - SQL and Exchange.</li> <li>• Group level (Instance/Storage group) or single database level snapshot creation.</li> <li>• Recovery of database based on point-in-time snapshots or media backup.</li> <li>• Exchange Database Integrity check using Microsoft utilities.</li> <li>• Integrates with HPE Data Protector &amp; Symantec Netbackup for Media Backup &amp; recovery.</li> <li>• Supports 2 types of recovery:             <ul style="list-style-type: none"> <li>• Volume Recovery</li> <li>• File Copy Recovery</li> </ul> </li> <li>• Supports recovery from tape backup.</li> <li>• Supports snapshot policy management (snapshot rotation).</li> <li>• Supports Microsoft Cluster Server (MSCS), Cluster Continuous Replication (CCR) and Data Availability Group (DAG) environments.</li> <li>• Applications and Platform             <ul style="list-style-type: none"> <li>• Supports SQL 2005, 2008 &amp; R2, Exchange 2007, 2010.</li> <li>• Supports Windows platforms as supported by the above applications.</li> </ul> </li> <li>• Supports P2000 G3 (FC/iSCSI/SA).</li> </ul>	

**HPE P2000 Remote Snap Software (G3 FC and FC/iSCSI, 1GbE and 10GbE iSCSI controllers only)**

- HPE P2000 Remote Snap Software is array based software that provides remote replication on the HPE P2000 G3 MSA Array products (except SAS model). HPE Remote Snap is a form of asynchronous replication which consists of replication of block-level data from a volume on a local system to a volume that may be on the same system or on a second independent system. This second system may be collocated with the first system or may be located at a remote site. It requires T230Rxx controller firmware or higher.
- HPE Remote Snap functionality is based on existing Snapshot technology offered by HPE P2000 SAN Array products. Snapshots are used to track the data to be replicated as well as to determine the differences in data updated on the master volume, minimizing the amount of data to be transferred.
- HPE Remote Snap replication technology provides the ability to accomplish key data management and protection capabilities. First, because Remote Snap uses snapshots as the underlying technology it creates multiple local recovery points which can be used for such tasks as to complement daily backups; second, replication provides the ability to access data in a remote site which could be used for dispersed operations; and third but definitely not least important replication allows for business continuance in the event of a failure on the primary

## Software

site.

- In order to perform a replication, a snapshot of the volume to be replicated is taken, creating a point-in-time image of the data. This point-in-time image is then replicated to the destination volume by copying the data represented by the snapshot via a transport medium such as TCP/IP (iSCSI) or Fibre Channel. The amount of data transferred is minimized through the use of snapshots whenever possible.

HPE P2000 Array System Remote Snap Software LTU

TA808A

HPE P2000 Array System Remote Snap Software E-LTU


TA808AAE

**(NOTE: One license per array is required for replication. For example, if you have two P2000 arrays performing replication (from Primary system to Remote System), you will need 2 licenses).**

## Product Features

- Storage based asynchronous snapshot replication
- Initial copy of data can be performed locally, reducing burden on wide area networks
- Support of both Ethernet and Fiber Channel interconnects provides flexible options to the application environments.
- Snapshot based replication technology means only changed data will be replicated to alternate site
- Many to 1 replication (up to 4 nodes) - primary use case is to replicate from "many" branch offices to the home office for the purpose of backing up data from the branches
- Single controller to single controller replication
- Mixed controller replication - replication between P2000 G3 Fibre Channel and P2000 G3 FC/iSCSI Combo arrays
- Advanced scheduler provides several options to IT administrators for business continuance
- Flexible architecture allows remote replication between P2000 G3 Fibre Channel and/or P2000 G3 FC/iSCSI Combo arrays. You can also join dissimilar controllers; for instance a Combo controller can snap remotely to a 1 or 10 GbE iSCSI array. Protects existing investments and enhances business continuity planning objectives.
- Replication Wizard simplifies the task of setting up and establishing replication pairs from one unified, easy to use GUI.
- Snapshot based replication enables both local and remote recovery depending on the need. Snapshot replication isolates problems to a specific point in time which can be selected by the administrator. Additionally snapshot replication supports longer distance replication.
- Multiple relationships provide greater storage flexibility and utilization.
- Bundled 64 Snapshots and Volume Copy integration provides better efficiencies by combining the management and array technologies to create local copies.
- Fast application recovery with minimal or no transaction loss
- Creation of disaster tolerant copies of your critical business data
- No-single-point-of-failure solution to increase the availability of your customers data

## Software

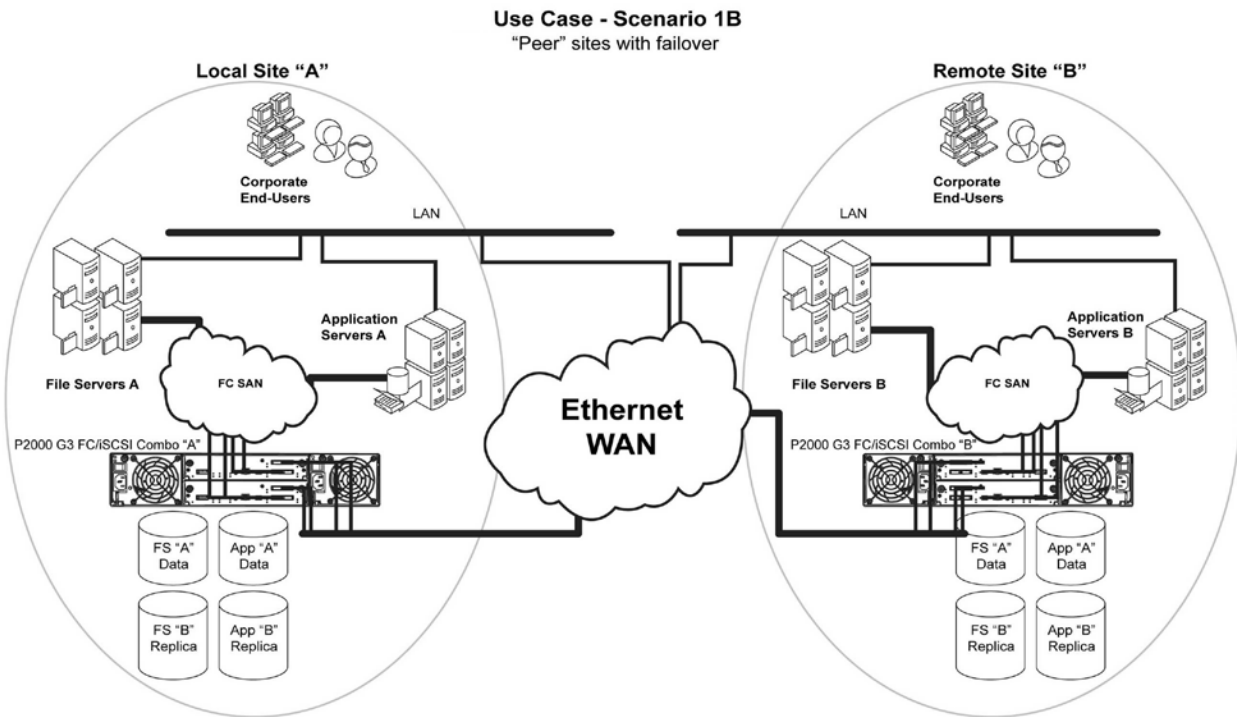

### Customer Benefits

#### Disaster Recovery

Replication technology has typically been used to address disaster recovery issues. Disaster recovery is still the driving business case behind replication. Remote replication can be implemented from the production site to one or more remote sites across a campus, across town, across a state or across the country. When a disaster strikes the primary location, the applications can be brought up at the remote site and continue processing against the replicated copies. When the primary site is back online, the replication can be reversed and when the data is resynchronized, processing can be switched back to the primary site and business can continue. In the past, if an e-mail system experienced a disaster it was an "oh well" moment. The loss of a day or more of e-mail was not considered important. Today, e-mail is a critical component of many companies' business plans and recovering e-mail after a disaster quickly and completely is required.

#### Maintenance

HPE Remote Snap software can also be used to solve other business needs. For instance, E-mail servers may need periodic maintenance that can take hours to complete. With remote replication in place, the downtime can be minimal (as long as it takes to bring the remote peer of the primary e-mail server online). The primary server can be worked on (patches, hardware upgrades, etc.) and then brought back online and into production. A whole datacenter can be failed over to a remote site on purpose to perform maintenance on generators, air conditioning, etc. Replication can also be used to perform a datacenter move with minimal downtime (fail everything to the DR site, move the production datacenter to its new location then fail the DR site back to the new datacenter).

#### Storage Based

Data replication is performed at the storage subsystem controller level and is totally transparent to the host, alleviating unnecessary host cycles to perform the data mirroring functions. Unlike a fabric based or host based solution, the storage based solution dedicates its resources to managing the replication process between arrays, with minimal impact to applications, other data or devices on the SAN.

#### Bi-Directional

The bidirectional HPE P2000 Array solution addresses the growing need among businesses to ensure continuous availability of applications that are critical to daily business operations. HPE P2000 enables two sites in a remote replication connection to use each other as a destination to maintain replicated



## Software

copies of online data. This maximizes resource utilization while enabling business continuance, even in the event of disaster.

### Disaster Tolerance

The P2000 G3 FC products utilize snapshot data online and in real time to a remote P2000 G3 through a local or extended storage area network (SAN). Additionally, data replication can be bidirectional, meaning that a storage array can be both a source and a destination. A particular LUN can be replicated in only one direction between the two storage arrays. Write I/O data sent to the source is replicated by HPE P2000 Array to the destination. A pair of properly configured HPE P2000 G3 FC arrays is a replication solution that guarantees data integrity in the event of a storage system or site failure.

### Normalization (first initial copy)

When a DR site is initially created a normalization or initial copy of the data from the source volume to the target volume must occur. The P2000 G3 array allows this first copy to take place locally. After completion the disks can be manually moved to the remote location. Subsequent changes will only remotely copy the changed blocks.

### SAN Extensions

HPE P2000 G3 Array provides the capability to replicate data over direct Fibre Channel. The distances supported over dark fiber are determined by the speed of the dark fiber connection and the technology used to communicate over the dark fiber.

### Path failover (MPIO)

MPIO for Windows provides a single multi-path solution for HPE P2000 G3 Modular Smart Array on HPE servers.

Support for Windows 2003 and Windows 2003 R2 operating systems is provided by HPE MPIO Full Featured DSM. For the P2000 G3 this version is 2.6.1.7 or greater.

Support for Microsoft Windows 2008 is bundled within the operating system

Support for Linux distributions is with Device Mapper 4.4.0 or greater.

Support for HP-UX is native multipathing in HPE-UX v3 and PV-Links in HPE-UX v2.

### HPE StoreEasy 3000 Gateway Storage

#### Add more value to your P2000 array

HPE MSA combined with HPE StoreEasy 3840 Gateway Storage enables you to consolidate block and file storage onto a single, high-performance system - giving your business the flexibility to meet changing business needs on-demand.

The HPE StoreEasy 3840 delivers efficient, secure, and highly available file services that help address your changing file-serving needs. It reduces your cost of ownership by simplifying management, increasing resource utilization, centralizing growth, and protecting data. HPE StoreEasy 3840 provides a simple and consistent experience for managing block and file storage for multiple workloads centrally.

HP StoreEasy 3840 Gateway Storage

E7X03A

HP StoreEasy 3840 Gateway Storage Blade

E7X08A

**NOTE:** For more information visit: <http://www.hp.com/go/StoreEasy>

Software

**HPE P2000 G3 Carrier-Grade Components**

The P2000 G3 is an 8 GB Fibre Channel connected 2U storage area network (SAN) or direct connect solution designed for network equipment providers (NEPs) and communication service providers. Suited for those who need a robust telecom infrastructure--- they need storage devices to catch videos, photos, text, new services --- and need a place to have the data stored and cached.

The HPE P2000 Carrier-Grade Chassis AP841B (RoHS Compliant SKU)) is a controller-less 6Gb chassis capable of supporting one or two P2000 G3 8Gb Fibre Channel controllers (AP836A (Retiring SKU) or AP836B (RoHS Compliant SKU)) and has twenty-four Small Form Factor (SFF) drive bays. It comes equipped with two DC-power power supplies.

The HPE P2000 2.5-in Dual I/O JBOD is a special model disk enclosure designed only for use with the carrier-grade array heads. It has 24 drive bays (unlike the D2700 with 25 drive bays) and has dual DC-power supplies. It is only sold with a carrier grade array. Five of these JBODs may be cascaded from the array head.

When used in conjunction with specific Storage SFF SAS drives, the solution is NEBS certified. NEBS level-3 certification provides the assurance that the equipment is safe to operate and sturdy enough to withstand certain physical and environmental (for example, fire, earthquakes) conditions. For Seismic Zone 4 rating, the P2000 must be mounted in an HPE Seismic Rack (AH335A)

<b>P2000 DC-power Carrier-grade SFF Chassis</b>	<b>RoHS Compliant SKU</b>
HP P2000 DC-power SFF Chassis	AP841B
<b>NOTE: NEBS certified</b>	
<b>G3 Controller 8Gb FC</b>	
HP P2000 G3 MSA Fibre Channel Controller	AP836B
<b>NOTE: (1 or 2) With two 8Gb FC ports per controller. NEBS certified.</b>	
<b>G3 Controller 10GbE iSCSI</b>	
HP P2000 G3 10GbE iSCSI MSA Array System Controller	AW595B
<b>NOTE: two 10GbE iSCSI ports per controller NEBS certified.</b>	
<b>G3 Controller 6Gb SAS</b>	
HP P2000 G3 SAS MSA Array System Controller	AW592B
<b>NOTE: (1 or 2) with four 6Gb SAS ports per controller. NEBS certified.</b>	
HP Modular Smart Array SC08e 2-ports Ext PCIe x8 SAS Host Bus Adapter	614988-B21
<b>SFF Carrier-grade (only) DC-power JBOD</b>	
HP P2000 Dual I/O DC-power Carrier-Grade SFF Drive Enclosure	BV921B
<b>NOTE: NEBS certified.</b>	
<b>24-drive SFF bays, NEBS certified, NOTE: only sold with carrier-grade arrays</b>	
<b>HPE MSA P2000 G3 Arrays support both the HPE ProLiant Server SFF Hard Disk Drives and HPE MSA SFF Hard Disk Drives</b>	
<b>HPE ProLiant Server Hard Disk Drives</b>	
HPE 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21
HPE 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	507127-B21

Software

HPE 450GB SAS 6G Enterprise 10K SFF (2.5in) ST 3yr Wty HDD	581284-B21
HPE 600GB SAS 6G Enterprise 10K SFF (2.5in) ST 3yr Wty HDD	581286-B21
HPE 900GB SAS 6G Enterprise 10K SFF (2.5in) ST 3yr Wty HDD	619291-B21
HPE 300GB SAS 6G Enterprise 15K SFF (2.5in) ST 3yr Wty HDD	627117-B21

**HPE MSA Hard Disk Drives**

**Drives, carrier-grade (all NEBS certified)**

HP MSA 146GB 6G SAS 15K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	E2D54A
HP MSA 300GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	E2D55A
HP MSA 450GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	E2D56A
HP MSA 600GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	C8S58A
HP MSA 900GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	C8S59A
HP MSA 300GB 6G SAS 15K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	C8S61A

**Carrier-grade HBA**

HPE 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B
NOTE:NOTE: Emulex 82E	

For more information on HPE Carrier Grade Platforms go to [http://www.hp.com/products1/servers/carrier\\_grade/index.html?jumpid=reg\\_R1002\\_USEN](http://www.hp.com/products1/servers/carrier_grade/index.html?jumpid=reg_R1002_USEN)

**HPE P2000 Remote Snap Software (G3 FC and FC/iSCSI, 1GbE and 10GbE iSCSI controllers only)**

- HPE P2000 Remote Snap Software is array based software that provides remote replication on the HPE P2000 G3 MSA Array products (except SAS model). HPE Remote Snap is a form of asynchronous replication which consists of replication of block-level data from a volume on a local system to a volume that may be on the same system or on a second independent system. This second system may be collocated with the first system or may be located at a remote site. It requires T230Rxx controller firmware or higher.
- HPE Remote Snap functionality is based on existing Snapshot technology offered by HPE P2000 SAN Array products. Snapshots are used to track the data to be replicated as well as to determine the differences in data updated on the master volume, minimizing the amount of data to be transferred.
- HPE Remote Snap replication technology provides the ability to accomplish key data management and protection capabilities. First, because Remote Snap uses snapshots as the underlying technology it creates multiple local recovery points which can be used for such tasks as to complement daily backups; second, replication provides the ability to access data in a remote site which could be used for dispersed operations; and third but definitely not least important replication allows for business continuance in the event of a failure on the primary site.
- In order to perform a replication, a snapshot of the volume to be replicated is taken, creating a point-in-time image of the data. This point-in-time image is then replicated to the destination volume by copying the data represented by the snapshot via a transport medium such as TCP/IP (iSCSI) or Fibre Channel. The amount of data transferred is minimized though the use of snapshots whenever possible.

HPE P2000 Array System Remote Snap Software LTU	TA808A
---	--------

## Software

HPE P2000 ArraySystem Remote Snap Software E-LTU

TA808AAE

**(NOTE: One license per array is required for replication. For example, if you have two P2000 arrays performing replication (from Primary system to Remote System), you will need 2 licenses).**

## Service and Support, HPE Care Pack, and Warranty Information

### Warranty

Three-year limited warranty, parts exchange Next Business day delivery

Enclosures, Hard drives, and Options for the P2000 G3 FC carry their own warranty. Refer to Hewlett Packard Enterprise's Limited Warranty Statement for more information.

The P2000 G3 FC has been designed with customer self-repairable parts to minimize repair time and provide greater flexibility in performing defective parts replacement. Please refer to Hewlett Packard Enterprise's limited warranty Statement and parts replacement instructions for further details.

<http://h18006.www1.hp.com/products/storageworks/warranty.html>

Products included in various kits carry their own individual warranties.

**NOTE:** The warranty of the hard drive options purchased with the P2000 G3 FC, SAS, and 10GbE iSCSI products is different for SAS hard drives versus SAS MDL and SATA hard drives. SAS hard drive options have a three year warranty and SAS MDL and SATA hard drives options have a one year warranty.

### Service and Support

#### Services to accelerate time to results

HPE Storage Services bring you a rich portfolio of consulting and support services designed to add value to our core storage products and solutions. We have the know-how and experience to put storage technology to work for you. We work closely with you as your strategic partner, leveraging our full services portfolio to make sure that everything works to optimize your enterprise.

Choose from services aligned to our storage product offerings and lifecycle. From mission-critical onsite services to innovative web-based remote support, you choose the precise level of attention and support your business demands.

### Discover, plan, and design

Choose from a rich portfolio of services to make the most of P2000 G3 MSA Array Systems (Goose Island - PL Li), so you can efficiently and affordably consolidate, manage, and extract value from unstructured data.

#### **HPE Services can help you discover needs and create a plan for simplifying the environment, reducing risk, and maximizing your storage investments**

**HPE Storage Efficiency Analysis** - The HPE Storage Efficiency Analysis provides customers with a view of their storage infrastructure and operating environment; highlighting recommendations for improvements. The report provides extensive insight about the existing storage environment, opportunities for efficiency gains, asset aging and replacement through interaction with key decision makers

<https://www.hpe.com/h20195/v2/getpdf.aspx/4aa3-6727enw.pdf>

**HPE Storage Impact Analysis (SIA)** - The HPE Storage Impact Analysis service provides a 2-4 week discovery engagement with executive summary presentation. The goal of this service is to help provide customers guidance on storage related issues and develop remediation plans.

<https://www.hpe.com/h20195/v2/getpdf.aspx/4aa4-1174enw.pdf>

**HPE Storage Cloud Design Service** - Build a scalable, low-cost enterprise storage environment with

## Service and Support, HPE Care Pack, and Warranty Information

inherent cloud benefits to meet big data needs.

**HPE Storage Modernization Service** - The HPE Storage Modernization service is a 4-6 week service that defines the customers envisioned target storage environment based on a proven solution design methodology. Hewlett Packard Enterprise architects will quickly perform tool-assisted automatic discovery and facilitate a two-day strategy workshop with all key stakeholders involved in the storage infrastructure initiative

<https://www.hpe.com/h20195/v2/getpdf.aspx/4aa3-4620enw.pdf>

---

### Deploy and integrate

**We can help you configure, set up, and efficiently use P2000 G3 MSA Array Systems (Goose Island - PL Li), as well as help migrate data, improve capacity utilization, and establish information management standards used across backup, replication, and archiving needs.**

**HPE MSA/P2000 Family Disk Array Installation and Startup Service** - Implement right from the start, as Hewlett Packard Enterprise experts install, test, and configure your hardware and software onsite. We deliver a tailored storage deployment properly integrated into your environment.

<https://www.hpe.com/h20195/v2/getpdf.aspx/4aa0-3048enw.pdf>

**HPE Storage Data Migration Services** - End-to-end data migration service providing seamless discovery, assessment, planning, and design, completely customizable to your organization's storage area network or network attached storage environment and using innovative software to help you migrate to HPE storage quickly and efficiently.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA3-0774ENW.pdf>

**HPE Storage and Data Residency Service** - Strategic augmentation of your current environment with Hewlett Packard Enterprise resources who become your trusted advisor to provide answers that are right for your storage and backup environment.

<https://www.hpe.com/h20195/v2/getpdf.aspx/4aa3-9481enw.pdf>

**HPE Proactive Select** - A flexible way to purchase services to fit your environment with an extensive menu of HPE Proactive Select event and technical services, such as onsite firmware upgrades, health checks, assessments, and education.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA2-3842ENW.pdf>

---

### Operate and support

**Choose the right support to maximize uptime, free up your resources, and achieve improved value-as you get the most out of the existing IT assets while accelerating time-to-revenue.**

**HPE Proactive Care 24x7** - Hardware and software support services designed specifically for your technology with rapid access to Advanced Solution Center Specialists plus firmware and software management and best practice advice

<https://www.hpe.com/h20195/v2/getpdf.aspx/4aa3-8855enw.pdf>

**HPE Proactive Care Advanced** - Building on HPE Proactive Care to give you personalized technical and operational advice from an assigned local Account Support Manager for personalized technical collaboration, flexible access to specialist skills to help fine-tune business critical IT, and Enhanced Critical Incident Management to help make sure your business is not affected if you experience a system or device outage.

**HPE Proactive Care Personalized Support** - An option-if you have HPE Proactive Care- to bring increased personalization of the Proactive Care support experience through the assignment of an Account Service Manager (ASM) who provides IT best practice advice to help address IT issues and projects. <https://www.hpe.com/h20195/v2/getpdf.aspx/4aa4-3446enw.pdf>

## Service and Support, HPE Care Pack, and Warranty Information

**HPE Foundation Care 24x7 Service** - HPE Foundation Care 24x7 connects you to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues - hardware onsite response within four hours and software call back within two hours after opening your case. Three years' coverage recommended with HPE Care Pack Service.

**HPE Education Services** - Comprehensive training for new, as well as experienced, storage administrators designed to expand your skills and keep you up to speed with the latest storage and virtualization technology from HPE Storage.

<http://education.hp.com/curr-storsan.htm>

---

### Optimized Care -

Delivers the highest levels of performance and stability through deployment and proactive management practices

### Choose from three levels of operate and support care

#### HPE 6hr CTR Proactive Care Service

**Additional options** - HPE Proactive Care Personalized Support (once per Proactive Care support new environment), an additional day of Hewlett Packard Enterprise Personalized Support, and 10 additional Hewlett Packard Enterprise Proactive Select credits per year, per array

---

### Standard Care -

maintains high level of uptime, along with expert help to cut the cost and complexity of implementation and support

#### HPE Proactive Care 24x7

**Additional options** - HPE Proactive Care Personalized Support (once per Proactive Care support new environment), an additional day of HPE Personalized Support, and 10 additional HPE Proactive Select credits per year, per array

---

**Basic Care** - Minimum recommended support

#### HPE Foundation Care 24x7

**Additional options** - 10 Proactive Select Credits per Year

---

### Remote Support Automation

Hewlett Packard Enterprise Automation provides 24x7 coverage, proactive problem prevention, accurate problem diagnosis and faster problem resolution, as well as interactive support portals and tools. This is an integral, and cost-free, part of your Hewlett Packard Enterprise support relationship and we are continually investing in additional cutting-edge capabilities to make it better.

---

### For more information

<http://www.hp.com/services/storage>

To learn more on HPE Storage Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner

HPE Pointnext operational services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from Hewlett Packard Enterprise or an enterprise reseller are quoted using Hewlett Packard Enterprise order configuration tools.
- Customers purchasing from a commercial reseller can find HPE Pointnext operational services at <http://www.hp.com/go/lookuptool>

---

### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the

## Service and Support, HPE Care Pack, and Warranty Information

maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.



## Configuration Information

### Configure to Order Program Information

Hewlett Packard Enterprise has a very successful Configure to Order program for the P2000 G3 family. The P2000 G3 models and options may or may not be factory installed in a rack with add-on controllers, switches, P2000 disk enclosures and hard drives. The P2000 G3 arrays may be integrated with ProLiant servers or as standalone storage.


Orders to be shipped through the CTO process must have a minimum of two drives of the same type (SAS, SAS MDL, or SATA) ordered per controller. SAN Starter Kits are not eligible for CTO.

Description	Product Number
<b>P2000 G3 Controllers &amp; Controller-less Chassis</b>	
HP P2000 G3 FC Modular Smart Array Controller <b>NOTE: two 8Gb FC ports</b>	AP836B#0D1
HP P2000 G3 FC/iSCSI Combo Modular Smart Array Controller <b>NOTE: two 8Gb FC ports and two 1GbE iSCSI ports</b>	AP837B#0D1
HP P2000 G3 SAS Modular Smart Array Controller <b>NOTE: four 6Gb 4x SAS ports</b>	AW592B#0D1
HP P2000 G3 10GbE iSCSI Modular Smart Array Controller <b>NOTE: two 10GbE iSCSI ports</b>	AW595B#0D1
HP P2000 G3 iSCSI MSA Array System Controller <b>NOTE: four 1Gb Ethernet iSCSI ports</b>	BK829B#0D1
HP P2000 Modular Smart Array 3.5-in Drive Bay Chassis (LFF) <b>NOTE: Will accept one or two controllers or Disk Enclosure I/O modules</b>	AP838B#0D1
HP P2000 Modular Smart Array 2.5-in Drive Bay Chassis (SFF) <b>NOTE: Will accept one or two controllers, not I/O modules</b>	AP839B#0D1
<b>Disk Enclosures</b>	
HP P2000 Dual I/O LFF Drive Enclosure, <b>NOTE: twelve 3.5" drive bays</b> Used with single or dual controller LFF or SFF array head	AP843B#0D1
HP P2000 LFF Drive Enclosure I/O Module <b>NOTE: no cable included. Designed for use with blank LFF chassis AP838A</b>	AP844B#0D1
HP MSA 2040 EnergyStar LFF Disk Enclosure <b>NOTE: twelve 3.5" drive bays</b>	M0S96A#0D1
<b>Configured Units</b>	
HP P2000 G3 FC MSA Dual Controller LFF Modular Smart Array System	AP845B#0D1
HP P2000 G3 FC MSA Dual Controller SFF Modular Smart Array System	AP846B#0D1
HP P2000 G3 FC/iSCSI MSA Dual Combo Controller LFF Array	AW567B#0D1
HP P2000 G3 FC/iSCSI MSA Dual Combo Controller SFF Array	AW568B#0D1
HP P2000 G3 SAS MSA Dual Controller LFF Modular Smart Array System	AW593B#0D1
HP P2000 G3 SAS MSA Dual Controller SFF Modular Smart Array System	AW594B#0D1
HP P2000 G3 10GbE iSCSI MSA Dual Controller LFF Array System	AW596B#0D1
HP P2000 G3 10GbE iSCSI MSA Dual Controller SFF Array System	AW597B#0D1
HP P2000 G3 iSCSI MSA Dual Controller LFF Array System	BK830B#0D1

## Configuration Information

HP P2000 G3 iSCSI MSA Dual Controller SFF Array System

BK831B#0D1

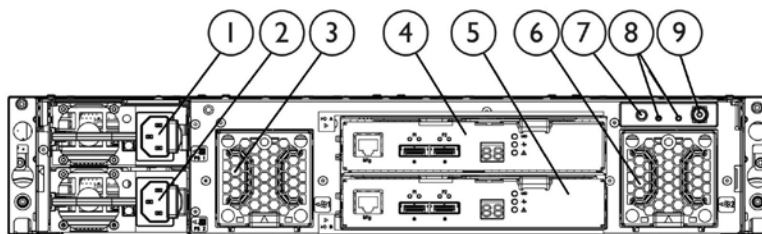

### HPE D2700 Disk Enclosure

#### Rear Panel components

- |                   |                 |                            |
|-------------------|-----------------|----------------------------|
| 1. Power Supply 1 | 4. I/O Module A | 7. Rear UID push button    |
| 2. Power Supply 2 | 5. I/O Module B | 8. Enclosure LEDs          |
| 3. Fan 1          | 6. Fan 2        | 9. Power on/standby button |

**D2700** HPE D2700 Disk Enclosure AJ941A#0D1

**NOTE:** 25 Small Form Factor (SFF) drive bays

### HPE MSA P2000 G3 Arrays support both the HPE ProLiant Server SFF Hard Disk Drives and HPE MSA SFF Hard Disk Drives

<b>HPE ProLiant Server SAS &amp; SATA Drives (SFF 2.5-inch)</b>	HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	507127-B21
	HPE 450GB SAS 6G Enterprise 10K SFF (2.5in) ST 3yr Wty HDD	581284-B21
	HPE 600GB SAS 6G Enterprise 10K SFF (2.5in) ST 3yr Wty HDD	581286-B21
	HPE 900GB SAS 6G Enterprise 10K SFF (2.5in) ST 3yr Wty HDD	619291-B21
	HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	718160-B21
	HPE 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21
	HPE 300GB SAS 6G Enterprise 15K SFF (2.5in) ST 3yr Wty HDD	627117-B21
	HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) ST 3yr Wty HDD	785099-B21
	HPE 450GB SAS 12G Enterprise 15K SFF (2.5in) ST 3yr Wty HDD	785101-B21
	HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) ST 3yr Wty HDD	785103-B21
	HPE 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	605835-B21

### HPE MSA SAS & SATA **12G SFF 10K SAS HDDs** Drives (SFF 2.5-inch)

HPE MSA 300GB 12G SAS 10K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive	J9F44A
HPE MSA 600GB 12G SAS 10K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive	J9F46A

**Configuration Information**

Drive

HPE MSA 900GB 12G SAS 10K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive J9F47A

HPE MSA 1.2TB 12G SAS 10K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive J9F48A

**6G SFF 10K SAS HDDs**

HP MSA 300GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive E2D55A

HP MSA 450GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive E2D56A

HP MSA 600GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive C8S58A

HP MSA 900GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive C8S59A

HP MSA 1.2TB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive E7W47A

HP MSA 14.6GB 6G SAS 15K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive E2D54A

HP MSA 300GB 6G SAS 15K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive C8S61A

HPE MSA 300GB 12G SAS 15K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive J9F40A

HPE MSA 450GB 12G SAS 15K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive J9F41A

HPE MSA 600GB 12G SAS 15K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive J9F42A

HP MSA 1TB 6G SAS 7.2K SFF (2.5-inch) Dual Port Midline 3yr Warranty Hard Drive C8S62A

**NOTE:** Go to the **HPE Hard Drive Compatibility table for complete drive compatibility information (<http://www.hp.com/products/harddiskdrives>)**. Using hard drives in unsupported configurations will result in voiding the warranty and could result in damage to the drive and/or loss of data.

**Step 1 - P2000 G3 - Base Configuration**

**Select one:**

**Model Name**

**SKU**

HP P2000 Modular Smart Array 3.5-inch Drive Bay Chassis AP838B

- Controller-less chassis with twelve Large Form Factor (LFF) drive bays. Space for two controllers.

HP P2000 Modular Smart Array 2.5-inch Drive Bay Chassis AP839B

- Controller-less chassis with twenty-four Small Form Factor (SFF) Storage drives bays. Space for two controllers.

There are two array-head chassis - one with twelve 3.5-inch large form factor bays, the other with twenty-four 2.5-inch small form factor drive bays. For an additional twelve drive bays purchase a P2000 3.5-inch Disk Enclosure. You may attach a total of seven P2000 Drive Enclosures for a total of ninety-six LFF drive bays. For 25 additional SFF drive bays purchase D2700 JBOD. You may attach a total of five D2700 JBODs for a total of one hundred and forty nine SFF drive bays. Dual I/O modules JBODS support both single and dual controller arrays.

## Configuration Information

### Step 2 - Options

Select each option with quantities specified.

#### Step 2a - Options

##### Quantity Description with Parts Shipped:

Quantity	Description with Parts Shipped:	SKU
1 or 2	HP P2000 G3 MSA Fibre Channel Controller <b>NOTE:</b> for either the LFF or SFF P2000 or the two DC-powered chassis	AP836B
1 or 2	HP P2000 G3 MSA FC/iSCSI Combo Modular Smart Array Controller <b>NOTE:</b> for either the LFF or SFF P2000 or the two DC-powered chassis	AP837B
1 or 2	HP P2000 G3 SAS MSA Array System Controller <b>NOTE:</b> for either the LFF or SFF P2000 or the two DC-powered chassis	AW592B
1 or 2	HP P2000 G3 10GbE iSCSI MSA Array System Controller <b>NOTE:</b> for either the LFF or SFF P2000 or the two DC-powered chassis	AW595B
1 or 2	HP P2000 G3 iSCSI MSA Array System Controller <b>NOTE:</b> for either the LFF or SFF P2000 or the two DC-powered chassis	BK829B

#### Step 2b - SAS and SATA Drive Options

**NOTE:** SATA drives are designed for archival or reference data. They should not be used in a heavy or intense I/O environment. Those situations require the use of enterprise-class SAS drives. P2000 3.5-inch drives are for use only with P2000 products.

##### P2000 Large Form Factor (LFF) SAS drives for P2000 G3 FC and P2000 3.5-inch Disk Enclosure

HP MSA 300GB 12G SAS 15K LFF (3.5in) Converter Enterprise 3yr Warranty Hard Drive	J9V68A
HP MSA 450GB 12G SAS 15K LFF (3.5in) Converter Enterprise 3yr Warranty Hard Drive	J9V69A
HP MSA 600GB 12G SAS 15K LFF (3.5in) Converter Enterprise 3yr Warranty Hard Drive	J9V70A

##### P2000 Large Form Factor (LFF) SAS MDL DP drives for P2000 G3 FC and P2000 3.5-inch Disk Enclosure

HP P2000 1TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port MDL Hard Drive	AP861A
HP P2000 2TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port MDL Hard Drive	AW555A
HP P2000 3TB 6G SAS 7.2K LFF (3.5-inch) Dual Port MDL 1yr Warranty Hard Drive	QK703A
HP MSA 4TB 6G SAS 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	C8R26A
HP MSA 6TB 6G SAS 7.2K 3.5in Midline 1yr Warranty Hard Drive	J9F36A

**NOTE:** Before installing >3TB HDDs in an P2000 G3 Array please update P2000 array controller firmware to version TS230Rxxx or later

##### MSA2 Large Form Factor (LFF) SATA drives for P2000 array head an P2000 disk enclosure

HP MSA2 1TB 7.2K rpm LFF (3.5 inch) Dual-port SATA Hard Disk Drive	AJ740B
HP P2000 2TB 3G SATA 7.2K rpm LFF MDL Hard Drive	AW556B

#### HPE MSA P2000 G3 Arrays support both the HPE ProLiant Server SFF Hard Disk Drives and HPE MSA SFF Hard Disk Drives

#### HPE ProLiant Server Small Form Factor (SFF) SAS drives for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)

## Configuration Information

HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	507127-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581284-B21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581286-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	619291-B21
HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	718160-B21
HP 14.6GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21
HP 300GB 6G SAS 15K rpm SFF (2.5-inch) Hot Plug Enterprise 3yr Warranty Hard Drive	627117-B21
HP 300GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785099-B21
HP 450GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785101-B21
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785103-B21

### **HPE MSA Small Form Factor (SFF) SAS drives for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)**

#### **12G SFF 10K SAS HDDs**

HPE MSA 300GB 12G SAS 10K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive	J9F44A
HPE MSA 600GB 12G SAS 10K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive	J9F46A
HPE MSA 900GB 12G SAS 10K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive	J9F47A
HPE MSA 1.2TB 12G SAS 10K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive	J9F48A

#### **6G SFF 10K SAS HDDs**

HP MSA 300GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	E2D55A
HP MSA 450GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	E2D56A
HP MSA 600GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	C8S58A
HP MSA 900GB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	C8S59A
HP MSA 1.2TB 6G SAS 10K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	E7W47A
HP MSA 14.6GB 6G SAS 15K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	E2D54A
HP MSA 300GB 6G SAS 15K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	C8S61A
HP MSA 300GB 12G SAS 15K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	J9F40A
HP MSA 450GB 12G SAS 15K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	J9F41A
HP MSA 600GB 12G SAS 15K SFF(2.5-inch) Dual Port Ent 3yr Warranty Hard Drive	J9F42A

### **HPE ProLiant Server Small Form Factor (SFF) SAS MidLine drive for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)**

HP 1TB 6G SAS 7.2K 2.5in Dual Port Midline 1yr Warranty Hard Drive	605835-B21
--	------------

### **HPE MSA Small Form Factor (SFF) SAS MidLine drive for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)**

HP MSA 1TB 6G SAS 7.2K SFF (2.5-inch) Dual Port Midline 3yr Warranty Hard Drive	C8S62A
---	--------

### **HPE ProLiant Server Small Form Factor (SFF) SATA MidLine drive for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)**


**(NOTE:** SFF SATA drives are single ported and therefore do not have a fail-over path intrinsic to their design)

## Configuration Information

HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive

507750-B21

### Step 2c - Drive Enclosure Options

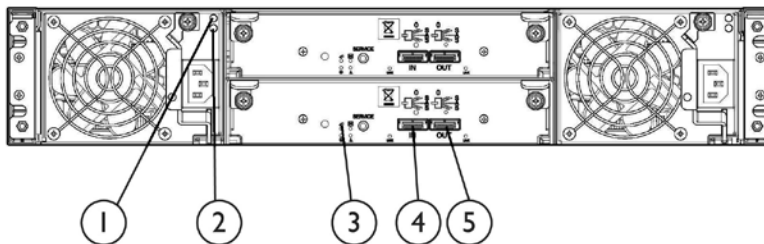

#### P2000 Dual I/O 3.5-inch 12 Drive Enclosure

##### Rear Panel components

- |                    |                 |                 |
|--------------------|-----------------|-----------------|
| 1. Power Indicator | 3. Unit Locator | 5. SAS Out Port |
| 2. Fault Indicator | 4. SAS In Port  |                 |

Use either disk enclosure with Large or Small Form Factor, single or dual controller array heads. Each ship with two .5m mini-SAS to mini-SAS cables.

HP P2000 Dual I/O LFF Drive Enclosure

AP843B

HPE D2700 Disk Enclosure

AJ941A

HPE MSA 2040 Energy Star LFF Disk Enclosure

MOS96A

HP P2000 LFF Modular Smart Array Chassis

NOTE:NOTE: Only used in conjunction with the P2000 blank chassis (AP838A) if a single I/O disk enclosure is desired. No cable included)

AP844B

### Step 2d - SAS Cable Options

#### miniSAS to miniSAS Cables:

Connecting P2000 G3 FC or SAS controller to a JBOD if a longer cable is desired. Also used for attaching the P2000 G3 SAS host ports to servers

HPE External Mini SAS 2m Cable

407339-B21

### Step 3 - Other P2000 G3 Options

#### Choose optional AC Power Cords (2 required)

**NOTE:** Two PDU cables: one 142263-008 (Black) and one 1422633-013 (Grey), ship standard with all AC-powered enclosures.

Power Cord, (Australia/China/New Zealand)

227098-001

Power Cord, (Central Europe)

157215-001

Power Cord, (United Kingdom/Hong Kong)

157216-001

Power Cord, (Switzerland)

157219-001

Power Cord, (Italy)

157217-001

Power Cord, (Denmark)

157218-001

## Configuration Information

Power Cord, (Japan)	139867-001
Power Cord, (South East Asia/India)	157220-001

### Step 4 - Choose Supported Options For Fibre Channel Infrastructure

Fibre Channel Host Bus Adapters	Model	Description	SKU
<b>X86 servers</b>	<b>BladeSystem c-Class Fibre Channel Mezzanine HBAs</b>		
		QLogic QMH2562 8Gb FC HBA for HPE c-Class BladeSystem	451871-B21
		HP BLc Emulex LPe1205- 8Gb FC HBA for HPE c-Class BladeSystem	456972-B21
		Brocade 804 8Gb FC HBA for HPE BladeSystem c-Class, Windows, VMware, Linux	590647-B21
	<b>Fibre Channel HBAs</b>		
	<b>NOTE:</b> Please visit <a href="http://www.hp.com/go/fchba">http://www.hp.com/go/fchba</a> for product details and <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a> for compatibility details.		
	<b>Brocade Fibre Channel HBAs</b>		
		HP 81B PCI-e FC HBA Single Port	AP769B
		HP 82B PCI-e FC HBA Dual Port	AP770B
		HP 41B 4Gb PCI-e FC HBA	AP767B
	HP 42B 4Gb Dual-Port PCI-e FC HBA	AP768B	
<b>Emulex Fibre Channel HBAs</b>			
	HP 81E PCI-e FC HBA Single Port	AJ762B	
	HP 82E PCI-e FC HBA Dual Port	AJ763B	
	HP FC2142 4Gb PCI-e HBA	A8002B	
<b>QLogic Fibre Channel HBAs</b>			
	HP 81Q PCI-e FC HBA Single Port	AK344A	
	HP 82Q PCI-e FC HBA Dual Port	AJ764A	
	HP FC1142 4Gb PCI-e HBA	AE311A	
	HP FC1242 Dual Channel 4Gb PCI-e HBA	AE312A	
<b>Integrity servers</b>	<b>Integrity</b>		
		HP 4Gb 1-port PCI-X 2.0 Fibre Channel Host Bus Adapter	AB378B
		HP 4Gb 2-port PCIe Fibre Channel Host Bus Adapter	AD300A
		HP 4Gb 1-port PCIe Fibre Channel Host Bus Adapter	AD299A
		HP 4Gb 2-port PCIe Fibre Channel Host Bus Adapter	AD355A
		HP PCIe 1-port 4Gb and 1-port 1000BT Adapter	AD221A
		HP PCIe 2-port 4Gb and 2-port 1000BT Adapter	AD222A
		HP PCIe 2-port 4Gb and 2-port 1000BSX Adapter	AD393A
		HP PCI-X 1-port 4Gb FC and 1-port 1000BT Adapter	AD193A
		HP PCI-X 2-port 4Gb FC and 2-port 1000BT Adapter	AD194A
		HPE PCI Express 1-port 8Gb Fibre Channel SR (QLogic) Adapter	AH400A
		HPE PCI Express 2-port 8Gb Fibre Channel SR (QLogic) Adapter	AH401A
		HPE 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AH402A
	HPE 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AH403A	

Configuration Information

	<b>Integrity server blades</b>	QLogic QMH2562 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem	451871-B21
		Emulex LPe1205 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem	456972-B21
<b>Fibre Channel Switches</b>		HP 8/8 Base SAN Switch	AM866B
		HP 8/8 SAN Switch	AM867B
		HP 8/24 Base SAN Switch	AM868B
		HP 8/40 Base SAN Switch	AM869B
		HP 8/40 Power Pack+ SAN Switch	AM870B
		HP 8/80 Power Pack+ SAN Switch	AM872B
		HP 8/80 Base SAN Switch	AM871B
		HP 1606 Power Pack+ Extension SAN Switch	AP864B
		HP 1606 Full Extension SAN Switch	AP863B
		HP 1606 Base Extension SAN Switch	AP862B
		HP 2408 FCoE Base Converged Network Switch	AP801B
		HP 2408 FCoE Power Pack+ Converged Network Switch	AP802B
		Brocade 8/12c SAN Switch for HPE BladeSystem c-Class	AJ820B
		Brocade 8/24c SAN Switch for HPE BladeSystem c-Class	AJ821B
		Brocade 8/24c SAN Switch for HPE BladeSystem c-Class Power Pack+	AJ822B
		Brocade 16Gb/16 SAN Switch for HPE BladeSystem c-Class	C8S45A
		Brocade 16Gb/28 SAN Switch for HPE BladeSystem c-Class	C8S46A
		Brocade 16Gb/28 SAN Switch Pwr Pk+ for HPE BladeSystem c-Class	C8S47A
			<b>SKU</b>
			AQ233A
		HP 8/20q Fibre Channel Switch	AK241A
		<b>NOTE: 8 device ports active, upgradeable to 20 device ports active</b>	
		HP 8Gb Simple SAN Connection Kit	AK242A
		<b>NOTE: 8 device ports active, upgradeable to 20 device ports active</b>	
		HPE 8/20q Fibre Channel Switch	AW575B
		<b>NOTE: 16 switch ports active</b>	
		HP SN6000 Stackable 8Gb 24-port single power supply FC Switch	AW576B
		<b>NOTE: 20 device ports active/4 stacking (ISL) ports active</b>	
		HP SN6000 Stackable 8Gb 24-port dual power supply FC Switch	BK780B
		<b>NOTE: 20 device ports active/4 stacking (ISL) ports active</b>	
		HP SN6000 Stackable 8 GB 12-port Single Power Fibre Channel Switch	AG646A
		<b>NOTE: 8 device ports/4 stacking (ISL) ports active, upgradeable to 20 device ports active</b>	
		Cisco MDS 9124 8-ports Active Fabric Switch	AG647A
		Cisco MDS 9124 16-ports Active Fabric Switch	AG648A
		Cisco MDS 9124 24-ports Active Fabric Switch	AW563A
		Cisco MDS 8Gb 12-port Fabric Switch for HPE BladeSystem c-Class	AW564A
		Cisco MDS 8Gb 24-port Fabric Switch for HPE BladeSystem c-Class	AG641A
		Cisco MDS 9124e 12-port Fabric Switch for HPE c-Class BladeSystem	AG642A
		Cisco MDS 9124e 24-port Fabric Switch for HPE c-Class BladeSystem	AG874A
		Cisco MDS 9134 24-ports Active Fabric Switch	AG875A



## Configuration Information

	Cisco MDS 9134 32-ports Active Fabric Switch	AG851B
	Cisco MDS 9222i Fabric Switch	AW585A
	HP SN6000C 16-ports Active Fabric Switch	AW586A
	HP SN6000C 32-ports Active Fabric Switch	AP775A
	HP Nexus 5010 Converged Network Switch	AP776A
	HP Nexus 5020 Converged Network Switch	QK732A
<b>PremierFlexOM4+ type cable P2000 G2</b>	1m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK733A
	2m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK734A
	5m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK735A
	15m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK736A
	30m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK737A
	50m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	AJ833A
<b>OM3 FC LC-LC cables options for the P2000 G3</b>	LC-LC Multi-Mode OM3 Fibre Channel Cable 0.5m	AJ834A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 1m	AJ835A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 2m	AJ836A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 5m	AJ837A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 15m	AJ838A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 30m	AJ839A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 50m	AJ839A

## Step 4a - Choose Supported Options For 10GbE Infrastructure

- verify that the cable/transceiver is supported with the connecting device (i.e. switch or NIC/iSCSI HBA)

<b>Copper Cable</b>	HPE BladeSystem c-Class 10GbE SFP+ to SFP+ 1m Direct Attach Copper Cable	487652-B21
	HPE BladeSystem c-Class 10GbE SFP+ to SFP+ 3m Direct Attach Copper Cable	487655-B21
	HPE BladeSystem c-Class 10GbE SFP+ to SFP+ 5m Direct Attach Copper Cable	537963-B21
	HPE BladeSystem c-Class 10GbE SFP+ to SFP+ 7m Direct Attach Copper Cable	487658-B21
	HPE BladeSystem c-Class 10Gb SFP+ SR Transceiver	455883-B21
<b>SFP</b>	HPE BladeSystem c-Class 10Gb SFP+ LRM Transceiver	455889-B21
	HPE X242 10G SFP+ to SFP+ 1m Direct Attach Copper Cable	J9281B
	HPE X242 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	J9283B
	HPE X242 10G SFP+ to SFP+ 7m Direct Attach Copper Cable	J9285B
	HPE X132 10G SFP+ LC SR Transceiver	J9150A
	HPE X132 10G SFP+ LC LRM Transceiver	J9152A
	HPE FlexNetwork X240 10G SFP+ to SFP+ 0.65m Direct Attach Copper Cable	JD095C
	HPE FlexNetwork X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable	JD096C

## Configuration Information

HPE FlexNetwork X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	JD097C
HPE FlexNetwork X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable	JG081C
HPE FlexNetwork X240 10G SFP+ SFP+ 7m Direct Attach Copper Cable	JC784C

## NIC

HP NC532m Dual Port 10GbE Multifunction BL-c Adapter	467799-B21
HP NC552SFP 10Gb 2-port Ethernet Server Adapter	614203-B21
HP NC552SFP 10GbE 2P Svr Adapter	Reference sell

## iSCSI HBA - standup

## iSCSI HBA - mezz

## NIC - mezz

## Step 4b - Choose Supported Options For SAS connection

HPE H221 PCIe 3.0 SAS Host Bus Adapter	729552-B21
HP Smart Array P712m/256 6Gb 2-ports Int/2-ports Ext Mezzanine SAS Controller	488348-B21
HPE Smart Array P711m/1G 6Gb FBWC 4-ports Ext Mezzanine SAS Controller	513778-B21
HPE 6Gb SAS Switch Single Pack for HPE BladeSystem c-Class	BK763A
HPE 6Gb SAS Switch Dual Pack for HPE BladeSystem c-Class	BK764A
HPE External Mini SAS 2m Cable	407339-B21
HPE External Mini SAS 4m Cable	432238-B21
HPE External Mini SAS 4m Cable	432238-B21

## Step 5 - Choose Rack Options

Please refer to the Hewlett Packard Enterprise Infrastructure products page for more information on Hewlett Packard Enterprise racks and rack options or the HPE 10000 G2 Series Rack QuickSpecs

<http://h18004.www1.hp.com/products/servers/platforms/rackandpower.html>

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123410>

Technical Specifications

<b>P2000 G3 FC</b> <b>P2000 G3 FC/iSCSI</b> <b>P2000 G3 SAS</b> <b>P2000 G3 10GbE iSCSI</b> <b>P2000 G3 iSCSI (1Gb)</b>	<b>POWER REQUIREMENTS</b>	
	Input Power Requirements (typical-running I/O) SFF/LFF arrays	<ul style="list-style-type: none"> <li>8G FC (2 Port - 8G FC) 110VAC 3.32A, 344-390 W; 220VAC 1.61A, 374-432W</li> <li>FC/iSCSI Combo (2 Port - 8G FC + 2 Port -1G iSCSI) 110VAC; 3.64A, 357-418W, 220VAC 1.77 A, 365-424W</li> <li>6G SAS (4 Port - 6G SAS) 110VAC 3.49A, 344-390W, 220VAC 1.7A 374-432W</li> <li>10GbE iSCSI (2 Port - 10 GbE iSCSI) 110VAC 3.67A, 395W, 220VAC, 1.95A 388.2W</li> <li>1G iSCSI (4 Port - 1GbE iSCSI) 110VAC 3.3A 363W, 220VAC, 1.63A 360W</li> </ul>
	Max Input Power	100-240 VAC, 50/60 Hz., 4.5-1.9A; 48-60 VDC 10.4A/8.3A
	Heat Dissipation	1622 BTU/hr
	<b>TEMPERATURE AND HUMIDITY RANGES</b>	
	Operating Temperature	41°F to 104 °F (5°C to 40°C)
	Shipping Temperature	-40°F to 158°F (-40°C to 70°C)
	Operating Humidity	10% to 90% RH @ 104 °F (40°C) non-condensing
	Non-Operating Humidity	Up to 93% RH @ 104°F (40°C)
	<b>DECLARED ACOUSTIC NOISE LEVELS</b>	
	Sound Power	A weighted sound power LWAd=6,75 B
	Sound Pressure	A weighted sound pressure LpAm - 55dB
	<b>SHOCK AND VIBRATION</b>	
	Shock, Operational	10G's for 10 milliseconds
	Shock, Non-Operational	15G 11ms half sine
Vibration, Operational	5-500Hz, 0.21Grms flat	
Vibration, Non-Operational	3-365-3Hz, 1.22 Grms, z-axis, 0.85 Grms, X&Y axis shaped spectrum	
<b>PHYSICAL</b>		
Height	3.5 in/ 8.9 cm	
Depth (excluding cables) (back of ear to back of controller handle)	P2000 G3 SFF 24-bay array: 20.28 in / 51.510 cm P2000 G3 LFF 12-bay array: 21.3 in. / 55.1 cm	
Width (body only)	17.6 in / 44.7 cm (w/ ears 19 in / 48.26 cm)	
Chassis Weight (no controllers)	P2000 LFF chassis: 34.1 lbs. (DC-pwr model: 37.9 lbs) P2000 SFF chassis: 32.3 lbs (DC-pwr model: 36.1 lbs)	

<b>P2000 G3 FC Controller</b>  <b>FC/iSCSI Combo Controller</b> <b>P2000 G3 SAS Controller</b>	<b>User Interface</b>	Status and activity provided via management interfaces. Status Indicators on front of Controller
	<b>RAID Support</b>	0, 1, 3, 5, 6, 10, 50
	<b>Cache Memory</b>	2GB Read/Write. ECC protection with backup to Flash memory (indefinite backup)
	<b>Cache Backup</b>	ECC protection with back up to flash memory (indefinite backup)
	<b>Upgradeable Firmware</b>	yes

Technical Specifications

<b>P2000 G3 10GbE iSCSI Controller</b>	<b>Disk Drive and Enclosure Protocol Support</b>	6 GB SAS - Serial Attached SCSI
<b>P2000 G3 iSCSI Controller (1Gb)</b>	<b>Host Ports</b>	FC: 2 x 8Gb Fibre Channel SFP+ SAS: 4 -4x lane 6 GB SAS Host Connections 10GbE iSCSI: 2 x 10GbE SFP+ 1GbE iSCSI: 4 x 1GbE RJ45
	<b>Expansion Port</b>	SAS (SFF8088) 4x lane 6 GB SAS
	<b>Weight, controller</b>	P2000 G3 Fibre Channel, FC/iSCSI, SAS, and 10GbE iSCSI MSA Controllers 4.5lbs. 1GbE iSCSI is 4.89 lbs

<b>P2000 G3 Regulatory Info</b>	<b>Safety</b>	UL 60950-1(USA)
		CAN/CSA-C22.2No.60950-1-03(Canada)
		EN 60950-1(European Union)
		GS mark(Germany)
		IEC 60950-1(International)
		CCC Mark(power supply only, China PRC)
	<b>Electromagnetic Compatibility</b>	VCCI:2008-04 Class A (Japan)
		FCC 15:109(g) Class A (USA)
		ICES-003:2004 Class A (Canada)
		EN55022 : (European Union Class A); CISPR 22 (International Class A)
		EN61000-3-2 : (Harmonics) (European Union)
		EN61000-3-3 : (Flicker) (European Union)
		EN 55024 (European Union, Immunity, Class A);CISPR 24 (International Immunity, Class A)
		AS/NZS CISPR 22, Class A (Australia, New Zealand)
	CNS 13438 Taiwan, Class A (Taiwan)	
KN22 Class A (Emissions Class A); KN24 (Immunity) (S Korea)		
<b>RoHS and WEEE</b>	RoHS-6/6 Compliance, China RoHS, WEEE	
<b>Country Approvals</b>	United States ,Australia/New Zealand, Canada, China (PRC), European Union, Germany(GS Mark), Japan, South Korea, Taiwan	

## Summary of Changes

Date	Version History	Action	Description of Change
23-Oct-2017	From Version 47 to 48	Changed	Care Pack naming and Service and Support- Parts and Materials updated.
25-Nov-2015	From Version 46 to 47	Added	Added a critical update of supporting the MSA 2040 LFF DE with the P2000 G3 array
16-Oct-2015	From Version 45 to 46	Changed	Cosmetic Changes
19-Jun-2015	From Version 44 to 45	Changed	Replaced AJ941A with AP843B on page 14 since it was a cut and paste error.
15-May-2015	From Version 43 to 44	Changed	Changes were made throughout the QuickSpecs.
30-Mar-2015	From Version 42 to 43	Changed	SKUs descriptions were updated, Obsolete SKU were removed.
		Added	Support for 12G SFF and LFF w Hard Disk Drives
01-Dec-2014	From Version 41 to 42	Changed	Changes were made throughout the QuickSpecs.
03-Oct-2014	From Version 40 to 41	Changed	Changes in the Family Information Section
29-Sep-2014	From Version 39 to 40	Changed	Changes were made throughout the QuickSpecs
09-May-2014	From Version 38 to 39	Changed	Operate and Support and Basic Care were revised.
28-Mar-2014	From Version 37 to 38	Changed	SFP cables and Supported options for SAS connection were revised in Configuration Information.
16-Jan-2014	From Version 36 to 37	Changed	Corrected an invalid part number in the Hardware Support section.
09-Dec-2013	From Version 35 to 36	Changed	Models, Family Information, Hardware, and Configuration Information were revised.
04-Oct-2013	From Version 34 to 35	Changed	Corrected an error in the Hardware section.
13-Sep-2013	From Version 33 to 34	Changed	Updated the following: Optional Software - Drives, carrier-grade (all NEBS certified) - HPE 600GB 6G SAS 10K 2.5in Dual Port Enterprise=3yr Warranty Storage Hard Disk Drive - changed part number from E2D57A to C8S58A.; Configuration Information - D2700 SAS & SATA Drives (SFF 2.5-inch) - HPE 600GB 6G SAS 10K 2.5in Dual Port Enterprise 3yr Warranty Storage Hard Disk Drive - changed part number from E2D57A to C8S58A; HPE 900GB 6G SAS 10K 2.5in Dual Port Enterprise 3yr Warranty Storage Hard Disk Drive - changed part number from E2D58A to C8S59A.
19-Aug-2013	From Version 31 to 33	Changed	Capacity, Drives available, Optional Disk enclosures, and Scalability were revised in Family Information HPE P2000 G3 Carrier-Grade Components and SAS & SATA Drives were revised in Configuration Information HPE MSA 4 TB 6G SAS 7.2K rpm LFF Midline Hard Drive was added to SATA and SATA Drive Options in Configuration Information Brocade 16Gb/16 and 16Gb/28 SAN Switches for HPE BladeSystem c-Class and Brocade 16Gb/28 SAN Switch Pwr Pk+ for HPE BladeSystem c-Class were added to Fibre Channel Switches in Configuration Information HPE 2000 Modular Smart Array Snapshot 255, 64, and 8 Software LTUs and 8 to 255, 64 to 255, and 8 to 64 Upgrade Software LTUs were removed from MSA2000 and MSA2000 G2 Snapshot and Volume Copy software in Options Software
19-Jun-2013	From Version 30 to 31	Removed	HPE MSA 4 TB 6G SAS 7.2K rpm Hard Drive was removed
13-May-2013	From Version 29 to 30	Removed	Configuration Information: Removed PremierFlex OM3+ type cables P2000 G3 sections from Step 4a
		Changed	Overview: Updated What's New with Adding support for the new HPE P2000 4 TB Large Form

Summary of Changes

			<p>Factor SAS MDL HDD                      HPE MSA 4 TB 6G SAS 7.2K 3.5 in MDL HDD                      Microsoft Windows Server 2012 support                      Support with HPE StoreEasy 3830 Gateway Storage or StoreEasy 3830 Gateway Storage Blades                      Models: Updated P2000 G3 Modular Smart Array section.                      Features: Updaaed Virtualization SAN Starter Kit section.                      Family Information: Updated Capacity, Scalability, DC-power chassis and P2000 Software and Documents Support CD sections.                      Optional Software: Updated Snapshot and Volume Copy Software for the P2000 G3, HPE P2000 Remote Snap Software (G3 FC and FC/iSCSI, 1GbE and 10GbE iSCSI controllers only), HPE StoreEasy 3000 Gateway Storage and HPE P2000 G3 Carrier-Grade Components sections.                      Configurations Information: Update d SAS &amp; SATA Drives (SFF 2.5-inch), Step 2b, Step 3 and Step 4a.</p>
29-Mar-2013	From Version 28 to 29	Changed	<p>Updated the following: What's new; Family Information - P2000 Software and Documents Support CD; OS Support - Fibre Channel ports; OS Support 1GbE iSCSI ports on the G3 combo FC/iSCSI controller; OS Support G3 SAS Controller; OS Support G3 1Gb 8SCSI Controller; OS Support G3 10GbE iSCSI controller; added section on HPE StoreEasy 3000 Gateway Storage</p>
21-Dec-2012	From Version 27 to 28	Changed	<p>Changes made in the following sections:                      Overview: in Overview and What's New                      Models: updated part numbers in P2000 G3 Modular Smart Array and P2000 G3 Array Bundles                      Features: updated part numbers in HPE 2000 G3 FC MSA SAN Starter Kits                      Family Information: updated part numbers in Scalability, DC-Power Chassis,                      Optional Software: updated part numbers in HP2000 G3 Carrier Grade Components                      Configuration Information: update product numbers in Configure to Order Program Information, D2700 SAS &amp; SATA Drives, in Step 1, Step 2 and Step 4a.</p>
		Removed	<p>Removed hyperlink in Service &amp; Support, HPE Care Pack and Warranty Information: For More Information section.</p>
23-Aug-2012	From Version 26 to 27	Changed	<p>Changes made to the North America and Canada versions only.</p>
13-Aug-2012	From Version 25 to 26	Changed	<p>Changes made throughout the entire QuickSpecs.</p>
14-May-2012	From Version 24 to 25	Changed	<p>Changes made throughout the entire QuickSpecs. Note that the title has changed.</p>
06-Apr-2012	From Version 23 to 24	Changed	<p>URL was changed for HPE Storage Management Pack for Microsoft System Center.</p>
09-Mar-2012	From Version 22 to 23	Changed	<p>URL was changed in Optional Software.</p>
02-Mar-2012	From Version 21 to 22	Changed	<p>Updated the following: Overview; What's New updated to reflect new 300GB 6G SAS 15K SFF drives; Key Features; Family Information - Performance; Optional Software - Product Features; HPE P2000 G3 Carrier-Grade Components; Configuration Information - D2700 - added new drive; Configuration Information - Step 2b - added new drive; Configuration Information - Step 4c.</p>
13-Feb-2012	From Version 20 to 21	Added	<p>All the HPE Storage Management Pack for Microsoft System Center section.</p>

## Summary of Changes

13-Jan-2012	From Version 19 to 20	Changed	P2000 G3 Array Bundles was revised G3 Controller 10GbE iSCSI and HPE 450GB and 600GB SAS 10K rpm SFF Dual Port Enterprise 3yr Warranty Hard Drives were added and G2 Controller 3Gb SAS were removed from HPE P2000 G3 Carrier-Grade Components Related Option: MSA2000 G2 Controllers were removed from P2000 G3 Modular Smart Array models
14-Nov-2011	From Version 18 to 19	Changed	P2000 G3 Array Bundles chart was revised in Models Citrix XenServer HPE Enterprise Edition was removed from Family Information HPE Storage Mirroring was removed from Optional Software
02-Sep-2011	From Version 17 to 18	Changed	Total LUNs, Maximum host supported and Optional Software were updated in the Family Information chart and Product Technology was revised in Family Information HPE Insight Control Storage Module for vCenter, HPE P2000 Remote Snap Software and Product Features were revised and vStorage API for Array Integration (VAAI) was added to Optional Software Fibre Channel Switches was updated in Step 4a of the Configuration Information
20-Jun-2011	From Version 16 to 17	Changed	Capacity was revised in the Family Information chart HPE 450GB and 600GB 6G SAS 10K 2.5 inch DP ENT HDDs were added to SAS and SATA Drives HPE P2000 3TB 6G SAS 7.2K LFF DP MDL HDD was added to P2000 Large Form Factor (LFF) SAS MDL DP drives for P2000 G3 FC and P2000 3.5-inch Disk Enclosure StorageWorks was removed throughout, including from the title
09-Jun-2011	From Version 15 to 16	Removed	Mentions of StorageWorks were removed.
09-May-2011	From Version 14 to 15	Changed	HPE Insight Control Storage Module for vCenter and HPE P2000 G3 Carrier-Grade Components were completely revised SAS and SATA Drives descriptions were revised Apple MAC OS X was added and Citrix XenServer HPE Enterprise Edition was removed from OS Support HPE StorageWorks 2300fc G2 Modular Smart Array Controller - 4 GB FC was removed from Models
01-Apr-2011	From Version 13 to 14	Changed	Server Compatibility was revised in Product Technology HPE Smart Array P712m Controller/256 for Server Blades, HPE Smart Array P711m Controller 1 for Server Blades and HPE StorageWorks 6Gb/s SAS BL Switch - Single and Dual Port for BladeSystems were added to Step 4c
18-Mar-2011	From Version 12 to 13	Changed	Small Form Factor SAS Capacity was increased SuSE Linux IA32, x64 and Citrix XenServer HPE Enterprise Edition were added to OS Support in Family Information HPE Ext Mini SAS 2m and 4m cables were added to Step 4c
07-Feb-2011	From Version 10 to 12	Changed	HPE 450GB and 600GB 6G SAS 10K 2.5 inch DP ENT HDD were added to ProLiant Small Form Factor (SFF) SAS drives for P2000 G3 Array and the D2700 JBOD in Step 2b Note was removed from P2000 G3 Array Bundles Model HPE StorageWorks Encryption SAN Switch was removed from Fibre Channel Switches in Step 4a
10-Jan-2011	From Version 9 to 10	Added	P2000 G3 Array Bundles was added to Models and HPE 72 GB 6G 15K 2.5 inch SAS DP HDD was added to HPE P2000 G3 and MSA2000 G2 Carrier-Grade Components.
15-Nov-2010	From Version 8 to 9	Changed	Changes made throughout the entire QuickSpecs.

## Summary of Changes

15-Oct-2010	From Version 7 to 8	Changed	Updated the Features - Application Solutions section only.
27-Sep-2010	From Version 6 to 7	Changed	Changes were made within the entire QuickSpecs, including removing Models and adding HPE StorageWorks P2000 G3 10GbE iSCSI Modular Smart Array Controller and HPE StorageWorks P2000 G3 10GbE iSCSI MSA Dual Controller LFF and SFF Array Systems to Configure to Order Program Information.
18-Aug-2010	From Version 5 to 6	Added	Added new Smart Buys to the Models section in the North America and Canada versions.
23-Jul-2010	From Version 4 to 5	Added	Added new Smart Buys to the Models section in the North America and Canada versions.
29-Jun-2010	From Version 3 to 4	Changed	Note the title has changed.
21-Jun-2010	From Version 2 to 3	Changed	Changes made throughout the entire QuickSpecs.
29-Mar-2010	From Version 1 to 2	Added	P2000 1TB and 2TB 6G SAS 7.2K LFF Hard Drives were added throughout the QuickSpecs.



**Sign up for updates**

★ Rate this document

---

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.  
Intel is a US registered trademark of Intel Corporation. Unix is a registered trademark of The Open Group.

c04-168365 - 13551 - Worldwide - V48 - 23-October-2017

